


PINOUT	PIN	DESCRIP
UR	1	LR
LR	2	UL
UL	3	SENSE
SENSE	4	LL
LL	5	

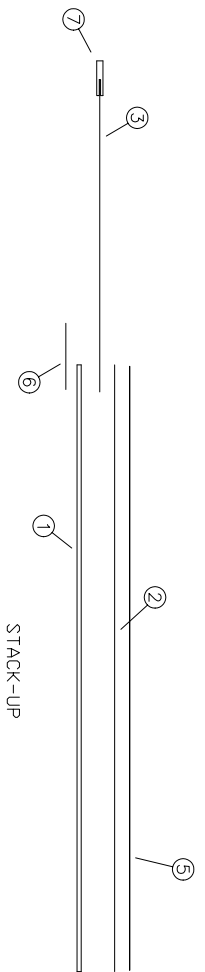

QTY	ITEM NO	PART NUMBER	DESCRIPTION
1	7	2500127	CONNECTOR
1	6	ASD 7600100	TAIL STRAIN RELIEF
1	5	ASD 6100161	TOPSHEET SUBASSY
A/R	4	4600127	ZA SENSE INTERCONNECT (NOT SHOWN)
1	3	ASD 7900362	TAIL SUBASSY
1	2	ASD 3700170	GASKET SUBASSY
1	1	ASD 5800209	BOTTOM SUBASSY

- NOTES:
1. SPACER DOTS: .004 X .140 (FINGER INPUT) (NOT SHOWN)
 2. TOPSHEET: ANTIGLARE
 3. TOTAL THICKNESS: .074 ±10%
 4. FLEXTAIL: DO NOT BEND TO LESS THAN 1/8" RADIUS
 5. LABEL: SERIAL NUMBER & PART NUMBER / REV. (FAR SIDE OF TAIL)
 6. CONNECTOR: 5 POS, .10 PITCH, AMP 48378-4
 7. TAIL SKEW: <3°

DO NOT SCALE DRAWING!
UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES.
REMOVE ALL BURRS AND BREAK SHARP EDGES.
DEC. TOLERANCE:
.XX = ±.060 UNO FRACTIONAL TOL. X/X = ±1/16
.XXX = ±.020 UNO
.XXXX = ±.015 UNO ANGULAR TOL. = ±1°
XXXXX = ±.008 UNO

NOTICE OF PROPRIETARY RIGHTS
THIS DOCUMENT, AND THE INFORMATION IT CONTAINS, IS PROPRIETARY TO TOUCH INTERNATIONAL. IT MUST NOT BE DUPLICATED, OR ITS CONTENTS USED OR DISCLOSED (IN WHOLE OR IN PART) WITHOUT WRITTEN PERMISSION FROM TOUCH INTERNATIONAL.

TOUCH INTERNATIONAL
2222 West Rundberg Ln #100
Austin, Texas 78758
512-832-8292

SENSOR RES SW
10.3 DIAG

SCALE: NTS
SIZE: A
DVG. NO: 48-F-5-103-002
REV: 2.0