



PINOUT	PIN	DESCRIP
UR	1	LR SENSE
LR	2	UL SENSE
UL	3	UR SENSE
UR	4	LR SENSE
UL	5	UR SENSE

STACK-UP

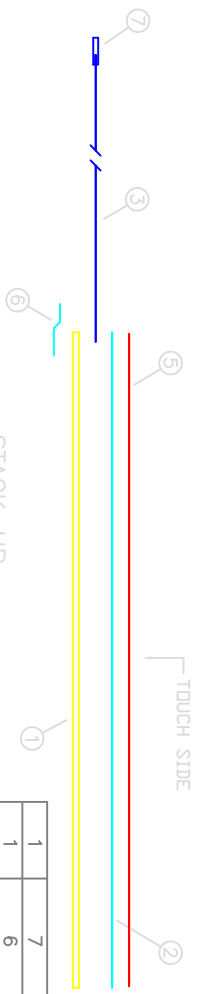


SPACER DOT DETAIL



NOTES:

1. SPACER DOTS: .004 [1.0] X .140 [3.56] (PEN/FINGER INPUT)
2. FINISH: ANTIGLARE
3. TOTAL THICKNESS: .136 [3.46] ±.10%
4. FLEXTAIL: DO NOT BEND TO LESS THAN 1/8" RADIUS
5. LABEL: SERIAL NUMBER & PART NUMBER / REV. (FAR SIDE OF TAIL)
6. LABEL: TI LABEL SPEC #6600099, TYPE 2, SIZE STANDARD (LOCATE APPROX WHERE SHOWN)
7. CONNECTOR: SR HEADER, 5 POS., .10 PITCH, AMP 487378-4
8. REFERENCE DELIVERY SPECIFICATION 6500244
9. ENVIRONMENTAL: RoHS COMPLIANT



TOUCH INTERNATIONAL  
 2222 West Rundberg Ln #100  
 Austin, Texas 78758  
 512-832-8292

SENSOR RES 5W  
 15.1 DIAG

DO NOT SCALE DRAWING!  
 UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES.  
 REMOVE ALL BURRS AND BREAK SHARP EDGES.  
 DEC. TOLERANCE:  
 .XX = ±.060 UNO FRACTIONAL X/X = ±1/16  
 .XXX = ±.020 UNO  
 .XXXX = ±.015 UNO ANGLE TOL. = ±1°  
 .XXXXX = ±.008 UNO

NOTICE OF PROPRIETARY RIGHTS  
 THIS DOCUMENT, AND THE INFORMATION IT CONTAINS, IS PROPRIETARY TO TOUCH INTERNATIONAL. IT MUST NOT BE DUPLICATED, OR ITS CONTENTS USED OR DISCLOSED (IN WHOLE OR IN PART) WITHOUT WRITTEN PERMISSION FROM TOUCH INTERNATIONAL.

DRAWN DATE	SCALE	SIZE	DWG. NO.	REV.
R. Johnson 5/08	NTS	A	48-F-5-151-003	2.0