
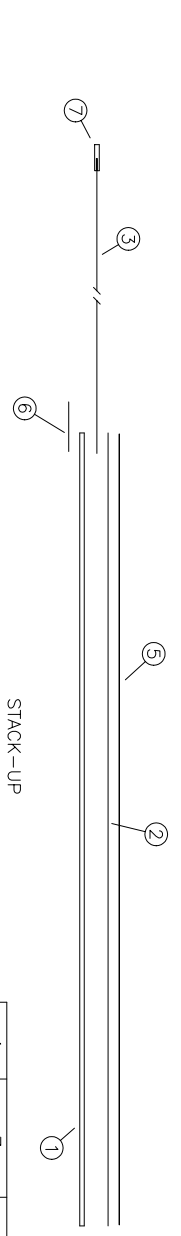


| REV | DESCRIPTION | ECD # | DFT | CHK | ENG | DATE |
|-----|--|---------|-----|-----|-----|----------|
| 2.2 | CHANGED SPACER DOT DIAMETER: WAS .004 X .140 | 0506057 | | JH | | 06/02/05 |

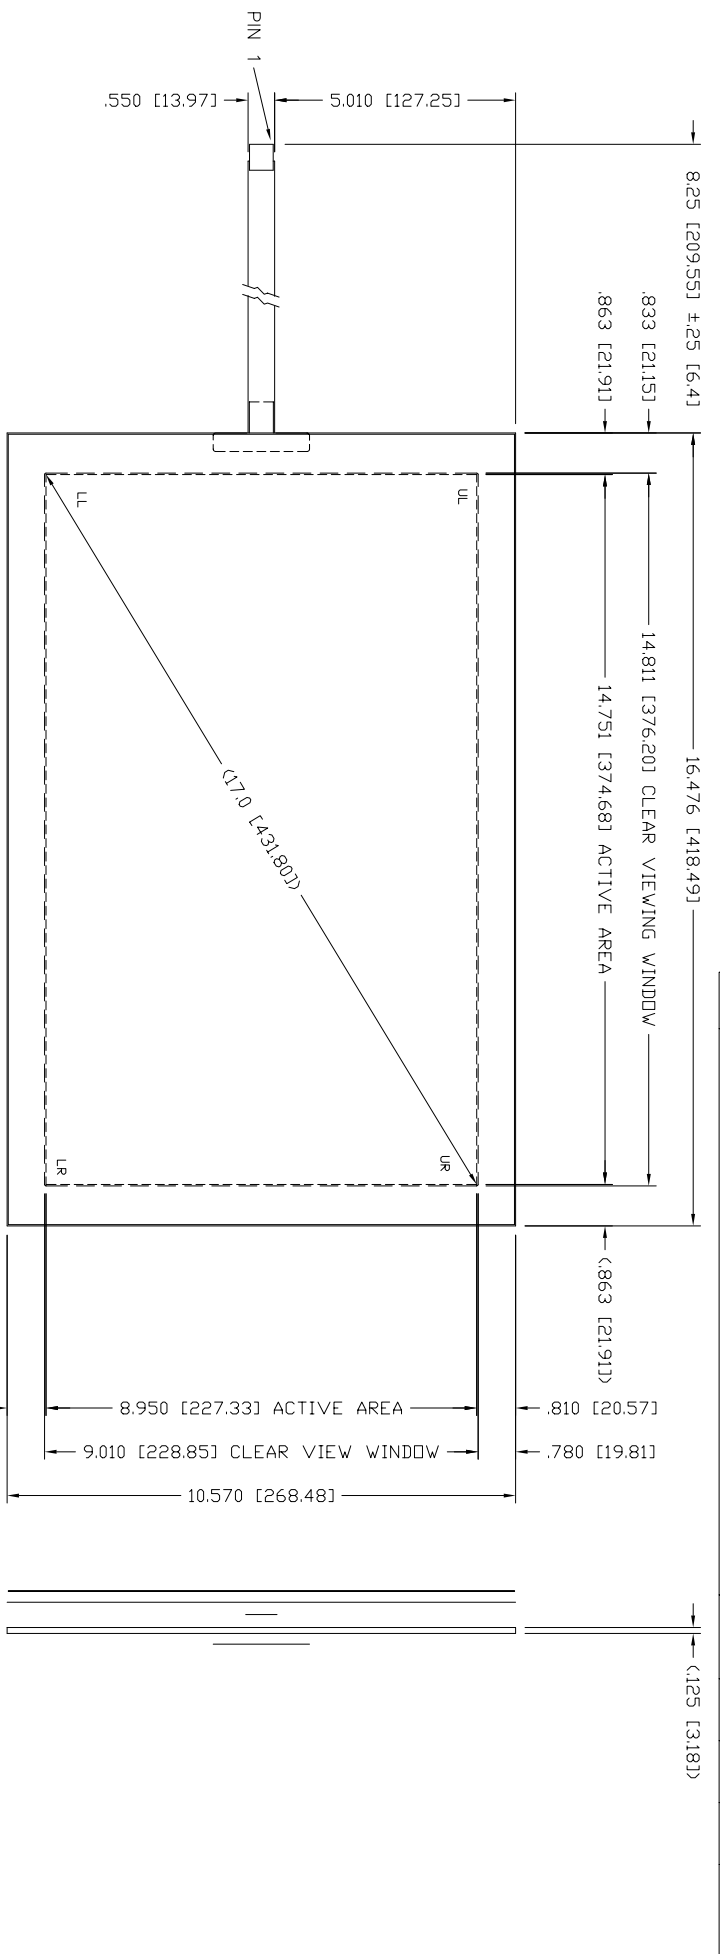

| PIN/OUT | DESCRIP |
|---------|---------|
| 1 | UL |
| 2 | UR |
| 3 | SENSE |
| 4 | LR |
| 5 | LL |

| QTY | ITEM NO | PART NUMBER | DESCRIPTION |
|-----|---------|-------------|-----------------------------------|
| 1 | 7 | 2500127 | CONNECTOR |
| 1 | 6 | ASD 7600100 | TAIL STRAIN RELIEF |
| 1 | 5 | ASD 6100159 | TOPSHEET SUBASSY |
| A/R | 4 | 4600127 | ZA SENSE INTERCONNECT (NOT SHOWN) |
| 1 | 3 | ASD 7900152 | TAIL SUBASSY |
| 1 | 2 | ASD 3700167 | GASKET SUBASSY |
| 1 | 1 | ASD 5800166 | BOTTOM SUBASSY |

| FINISHED PART # | DO NOT SCALE DRAWING! | UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES. REMOVE ALL BURRS AND BREAK SHARP EDGES. |
|-----------------|-----------------------|---|
| | DO NOT SCALE DRAWING! | UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES. REMOVE ALL BURRS AND BREAK SHARP EDGES. |
| | DEC. TOLERANCE: | DEC. TOLERANCE: |
| | .XX = ±.060 UNO | FRAC. TOL. X/X = ±1/16 |
| | .XXX = ±.020 UNO | ANGULAR TOL. = ±1° |
| | .XXXX = ±.015 UNO | |
| | .XXXXX = ±.008 UNO | |



TOUCH INTERNATIONAL
 2222 West Rundberg Ln #100
 Austin, Texas 78758
 512-832-8292

- NOTES:
1. SPACER DOTS: .006 [1.5] X .140 [3.56] (FINGER INPUT) (NOT SHOWN)
 2. TOPSHEET: ANTIGLARE
 3. TOTAL THICKNESS: .136 [3.45] ±10%
 4. FLEXTAIL: DO NOT BEND TO LESS THAN 1/8" RADIUS
 5. LABEL: SERIAL NUMBER & PART NUMBER / REV. (FAR SIDE OF TAIL)
 6. CONNECTOR: 5 POS, .10 PITCH, AMP 487378-4