


REV	DESCRIPTION	ECD #	DFT	CHK	ENG	DATE
2.2	CHANGED SPACER DOT DIAMETER: WAS .004 X .140	0506057		JH		06/02/05

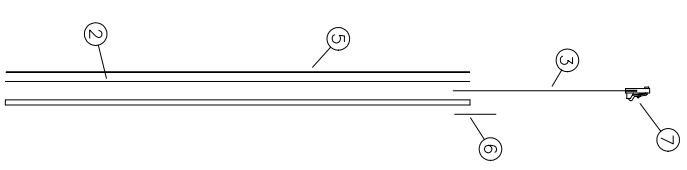

PINOUT	DESCRIP
1	UL
2	LL
3	SENSE
4	LR
5	UR

QTY	ITEM NO	PART NUMBER	DESCRIPTION
1	7	2500108	CONNECTOR
1	6	ASD 7600102	TAIL STRAIN RELIEF
1	5	ASD 6100201	TOPSHEET SUBASSY .007 THK
A/R	4	4600127	ZA SENSE INTERCONNECT (NOT SHOWN)
1	3	ASD 7900167	TAIL SUBASSY .003 THK
1	2	ASD 3700238	GASKET SUBASSY .004 THK
1	1	ASD 5800217	BOTTOM SUBASSY .125 THK

FINISHED PART # \_\_\_\_\_ NEXT ASSY # \_\_\_\_\_



DO NOT SCALE DRAWING!  
 UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES.  
 REMOVE ALL BURRS AND BREAK SHARP EDGES.  
 DEC. TOLERANCE:  
 .XX = ±.060 UNO FRACTIONAL X/X = ±1/16  
 .XXX = ±.020 UNO  
 .XXXX = ±.015 UNO ANGULAR TOL. = ±1°  
 .XXXXX = ±.008 UNO

TOUCH INTERNATIONAL  
 2222 West Rundberg Ln #100  
 Austin, Texas 78758  
 512-832-8292

NOTICE OF PROPRIETARY RIGHTS  
 THIS DOCUMENT, AND THE INFORMATION IT CONTAINS, IS PROPRIETARY TO TOUCH INTERNATIONAL. IT MUST NOT BE DUPLICATED, OR ITS CONTENTS USED OR DISCLOSED (IN WHOLE OR IN PART) WITHOUT WRITTEN PERMISSION FROM TOUCH INTERNATIONAL.

DRAWN DATE: R. Johnson 10/04  
 SCALE: NTS  
 SHEET 1 OF 1

SIZE: A  
 DVG. NO: 48-F-5-170-003  
 REV: 2.2

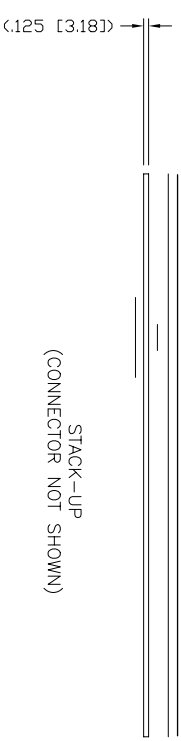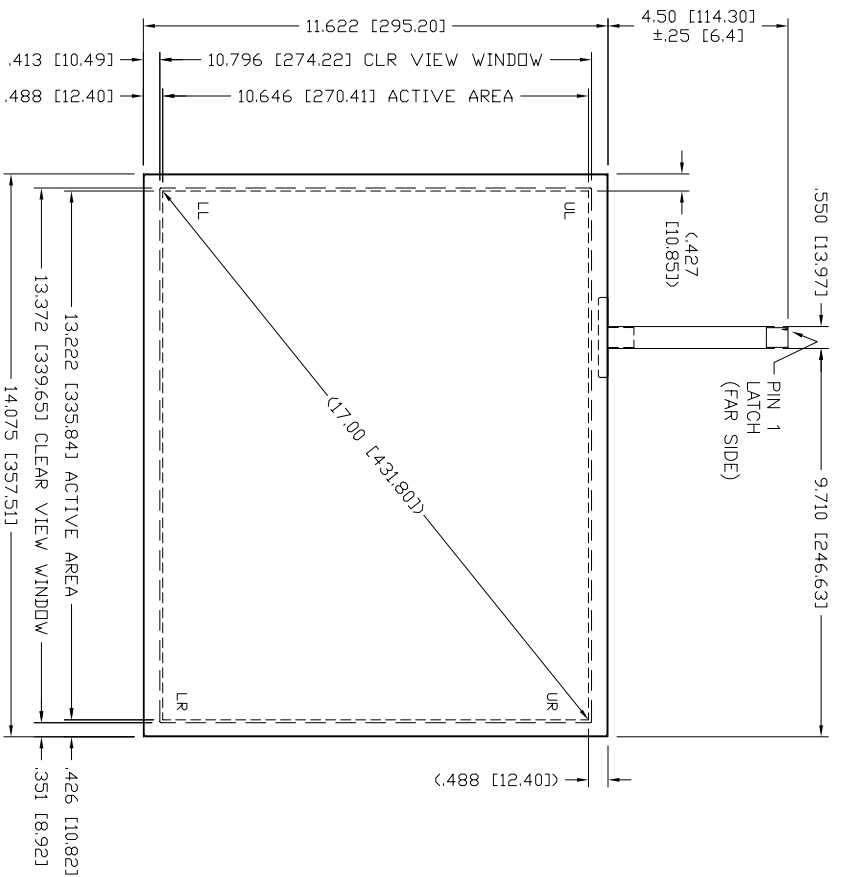

- NOTES:
1. SPACER DOTS: .006 [115] X .140 [3.56] (FINGER INPUT) (NOT SHOWN)
  2. TOPSHEET: ANTI-GLARE
  3. TOTAL THICKNESS: .136 [3.45] ±10%
  4. FLEXTAIL: DO NOT BEND TO LESS THAN 1/8" RADIUS
  5. LABEL: SERIAL NUMBER & PART NUMBER / REV. (FAR SIDE OF TAIL)
  6. CONNECTOR: 5 POS, .10 PITCH, LATCH, AMP 487526-4