


REV	DESCRIPTION	ECD #	DFT	CHK	ENG	DATE
2.1	CHANGED SPACER DOT DIAMETER: WAS .004 X .140	0506057		JH		06/02/05

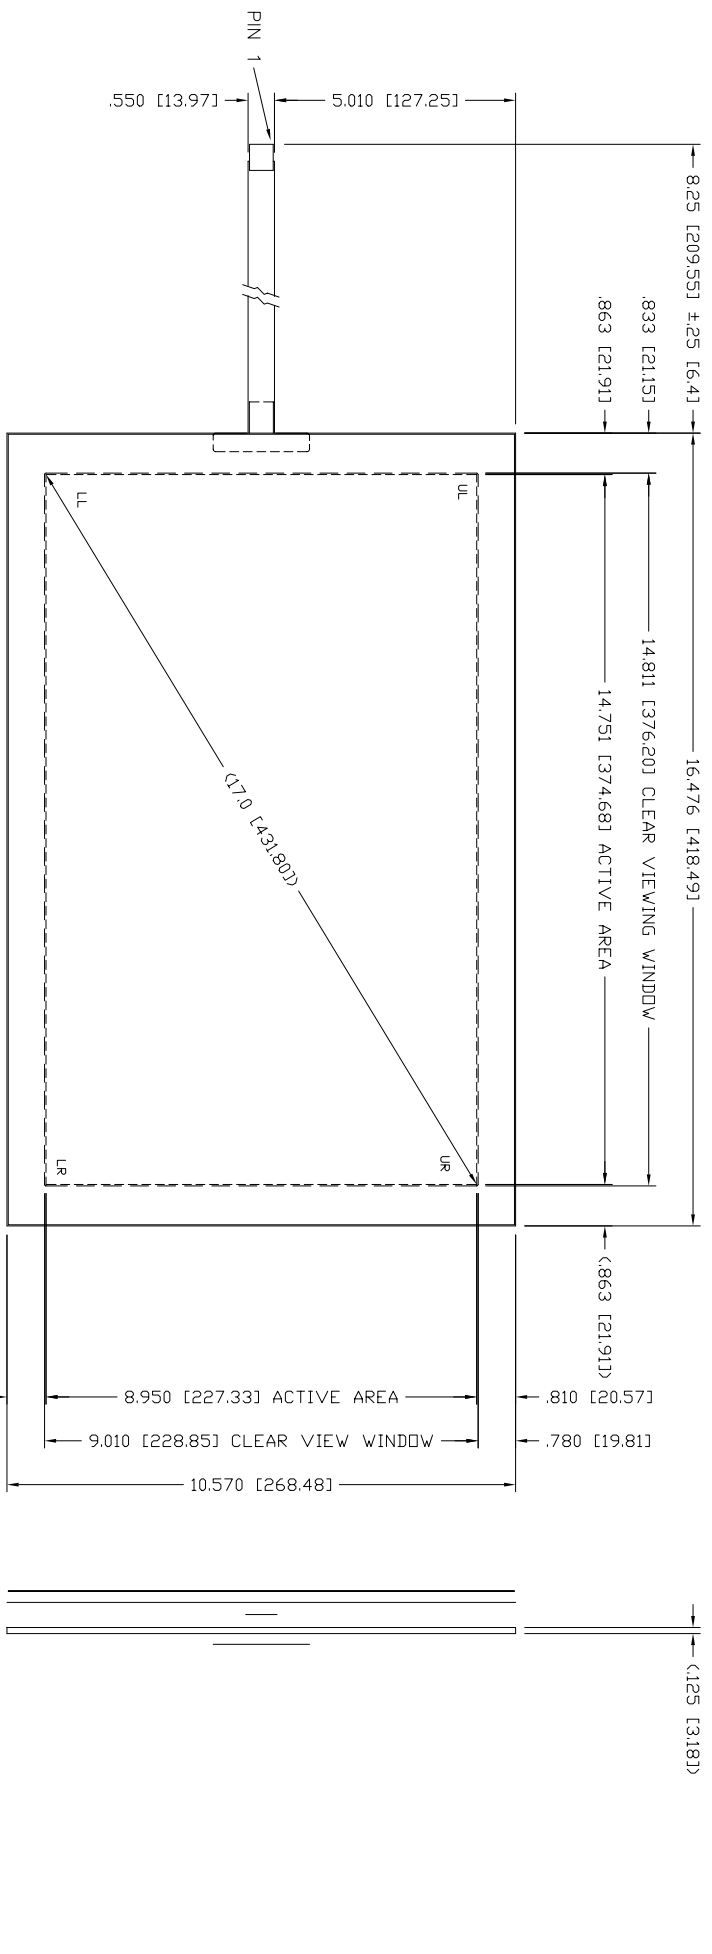

PINOUT	DESCRIP
1	UR
2	LR
3	SENSE
4	UL
5	LL

STACK-UP

QTY	ITEM NO	PART NUMBER	DESCRIPTION
1	7	2500127	CONNECTOR
1	6	ASD 7600100	TAIL STRAIN RELIEF
1	5	ASD 6100159	TOPSHEET SUBASSY
A/R	4	4600127	ZA SENSE INTERCONNECT (NOT SHOWN)
1	3	ASD 7900148	TAIL SUBASSY
1	2	ASD 3700167	GASKET SUBASSY
1	1	ASD 5800166	BOTTOM SUBASSY

FINISHED PART #	NEXT ASSY #	DESCRIPTION
DO NOT SCALE DRAWING!		
UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES.		
REMOVE ALL BURRS AND BREAK SHARP EDGES.		
DEC. TOLERANCE:		
.XX = ±.060 UNO	FRACTION	X/X = ±1/16
.XXX = ±.020 UNO		
.XXXX = ±.015 UNO	ANGULAR TOL. = ±1°	
.XXXXX = ±.008 UNO		



TOUCH INTERNATIONAL
 2222 West Rundberg Ln #100
 Austin, Texas 78758
 512-832-8292

- NOTES:
1. SPACER DOTS: .006 [15] X .140 [3.56] (FINGER INPUT) (NOT SHOWN)
 2. TOPSHEET: ANTIGLARE
 3. TOTAL THICKNESS: .136 [3.45] ±10%
 4. FLEXTAIL: DO NOT BEND TO LESS THAN 1/8" RADIUS
 5. LABEL: SERIAL NUMBER & PART NUMBER / REV. (FAR SIDE OF TAIL)
 6. CONNECTOR: 5 POS, .10 PITCH, AMP 487378-4