



REV	DESCRIPTION	ECD #	DFT	CHK	ENG	DATE
2.3	CHANGED SPACER DOT DIAMETER: WAS .004 X .140	0506057		JH		06/02/05

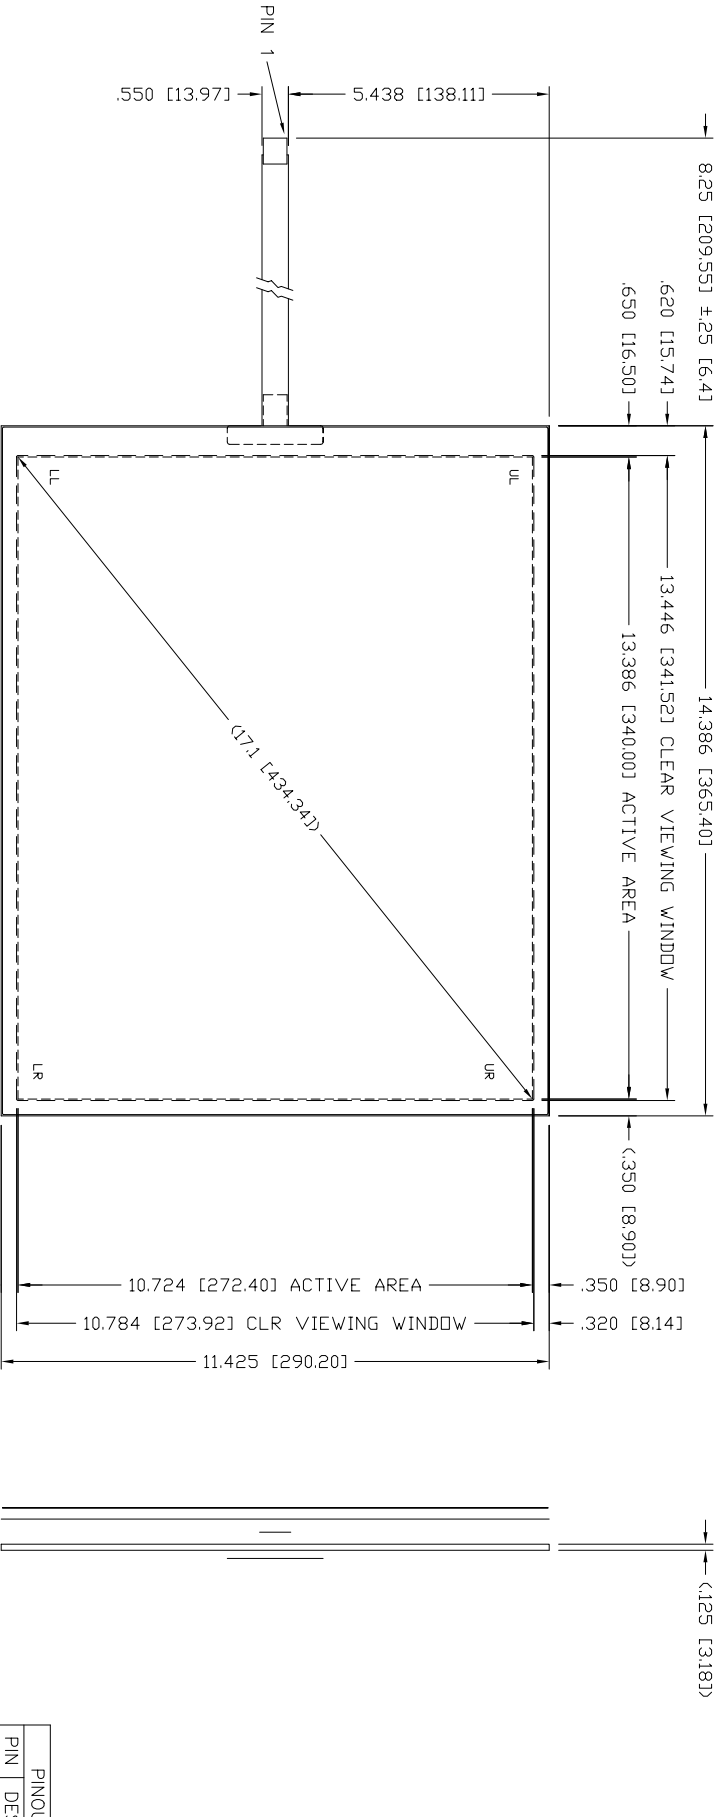

PIN	DESCRIPTION
1	UR
2	LR
3	SENSE
4	UL
5	LL

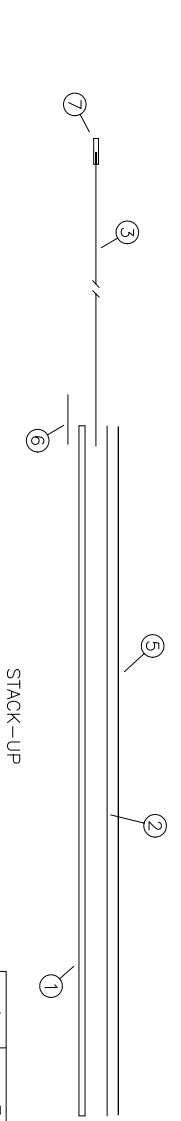

QTY	ITEM NO	PART NUMBER	DESCRIPTION
1	1	2500127	CONNECTOR
1	6	ASD 7600100	TAIL STRAIN RELIEF
1	5	ASD 6100167	TOPSHEET SUBASSY
A/R	4	4600127	ZA SENSE INTERCONNECT (NOT SHOWN)
1	3	ASD 7900153	TAIL SUBASSY
1	2	ASD 3700178	GASKET SUBASSY
1	1	ASD 5800240	BOTTOM SUBASSY

FINISHED PART #	DO NOT SCALE DRAWING!	UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES. REMOVE ALL BURRS AND BREAK SHARP EDGES.
	DEC. TOLERANCE:	.XX = ±.060 UNO
		.XXX = ±.020 UNO
		.XXXX = ±.015 UNO
		.XXXXX = ±.008 UNO
		FRACTIONAL TOL. X/X = ±1/16
		ANGULAR TOL. = ±1°

NOTICE OF PROPRIETARY RIGHTS
THIS DOCUMENT, AND THE INFORMATION IT CONTAINS, IS PROPRIETARY TO TOUCH INTERNATIONAL. IT MUST NOT BE DUPLICATED, OR ITS CONTENTS USED OR DISCLOSED (IN WHOLE OR IN PART) WITHOUT WRITTEN PERMISSION FROM TOUCH INTERNATIONAL.

- NOTES:
1. SPACER DOTS: .006 [1.5] X .140 [3.56] (FINGER INPUT) (NOT SHOWN)
 2. TOPSHEET: ANTICLARE
 3. TOTAL THICKNESS: .136 [3.45] ±10%
 4. FLEXTAIL: DO NOT BEND TO LESS THAN 1/8" RADIUS
 5. LABEL: SERIAL NUMBER & PART NUMBER / REV. (FAR SIDE OF TAIL)
 6. CONNECTOR: 5 POS, .10 PITCH, AMP 487378-4