| REV | DESCRIPTION | ECO # | DFT | CHK | ENG | DATE |
|---|---|---|---|---|---|---|
| 2.2 | CHANGED SPACER DOT DIAMETER: WAS .004 X .140 | 0506057 | | | JH | 06/02/05 |

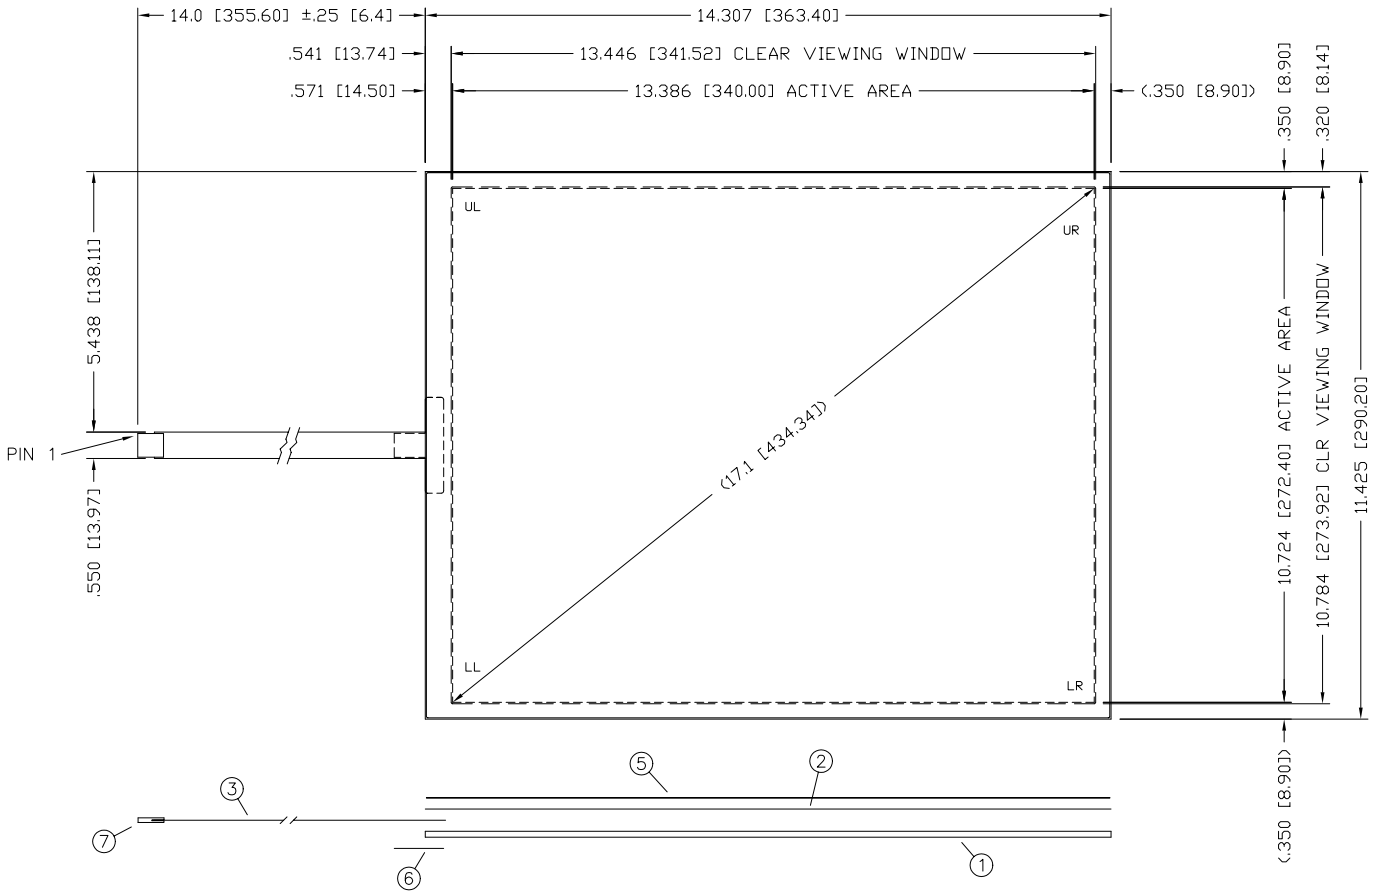


STACK-UP

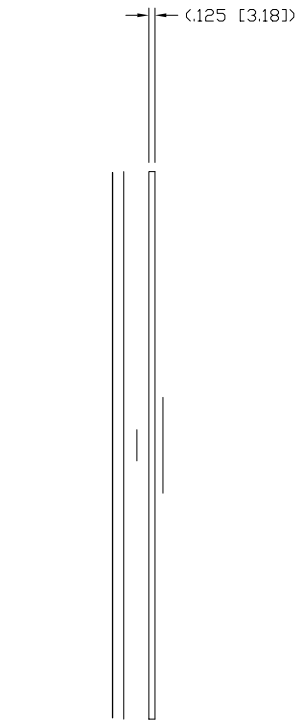


STACK-UP
(CONNECTOR NOT SHOWN)

| PINOUT | |
|---|---|
| PIN | DESCRIP |
| 1 | UR |
| 2 | UL |
| 3 | SENSE |
| 4 | LL |
| 5 | LR |

NOTES:

1. SPACER DOTS: .006 [.15] X .140 [3.56] (FINGER INPUT) (NOT SHOWN)
2. TOPSHEET: ANTIGLARE
3. TOTAL THICKNESS: .136 [3.45] ±10%
4. FLEXTAIL: DO NOT BEND TO LESS THAN 1/8" RADIUS
5. LABEL: SERIAL NUMBER & PART NUMBER / REV. (FAR SIDE OF TAIL)
6. CONNECTOR: 5 POS, .10 PITCH, AMP 487378-4

| QTY | ITEM NO | PART NUMBER | DESCRIPTION |
|---|---|---|---|
| 1 | 7 | 2500127 | CONNECTOR |
| 1 | 6 | ASD 7600100 | TAIL STRAIN RELIEF |
| 1 | 5 | ASD 6100170 | TOPSHEET SUBASSY .007 THK |
| A/R | 4 | 4600127 | ZA SENSE INTERCONNECT (NOT SHOWN) |
| 1 | 3 | ASD 7900172 | TAIL SUBASSY .003 THK |
| 1 | 2 | ASD 3700182 | GASKET SUBASSY .004 THK |
| 1 | 1 | ASD 5800201 | BOTTOM SUBASSY .125 THK |

FINISHED PART #

NEXT ASSY #

DO NOT SCALE DRAWING !

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES. REMOVE ALL BURRS AND BREAK SHARP EDGES.

DEC. TOLERANCE:
.XX = ±.060 UNO
.XXX = ± .020 UNO
.XXXX = ± .015 UNO
.XXXXX = ±.008 UNO

FRAC. TOL. X/X = ±1/16
ANGULAR TOL. = ±1°

NOTICE OF PROPRIETARY RIGHTS

THIS DOCUMENT, AND THE INFORMATION IT CONTAINS, IS PROPRIETARY TO TOUCH INTERNATIONAL. IT MUST NOT BE DUPLICATED, OR ITS CONTENTS USED OR DISCLOSED (IN WHOLE OR IN PART) WITHOUT WRITTEN PERMISSION FROM TOUCH INTERNATIONAL.

DRAWN DATE
R. Johnson 10/04

SCALE: NTS

SHEET 1 OF 1

TOUCH INTERNATIONAL
2222 West Rundberg Ln #100
Austin, Texas 78758
512-832-8292

TITLE:
SENSOR RES 5W
17.1 DIAG

| SIZE | DWG. NO. | REV. |
|---|---|---|
| A | 48-F-5-171-003 | 2.2 |

ACAD