



REV	DESCRIPTION	ECD #	DFT	CHK	ENG	DATE
1						

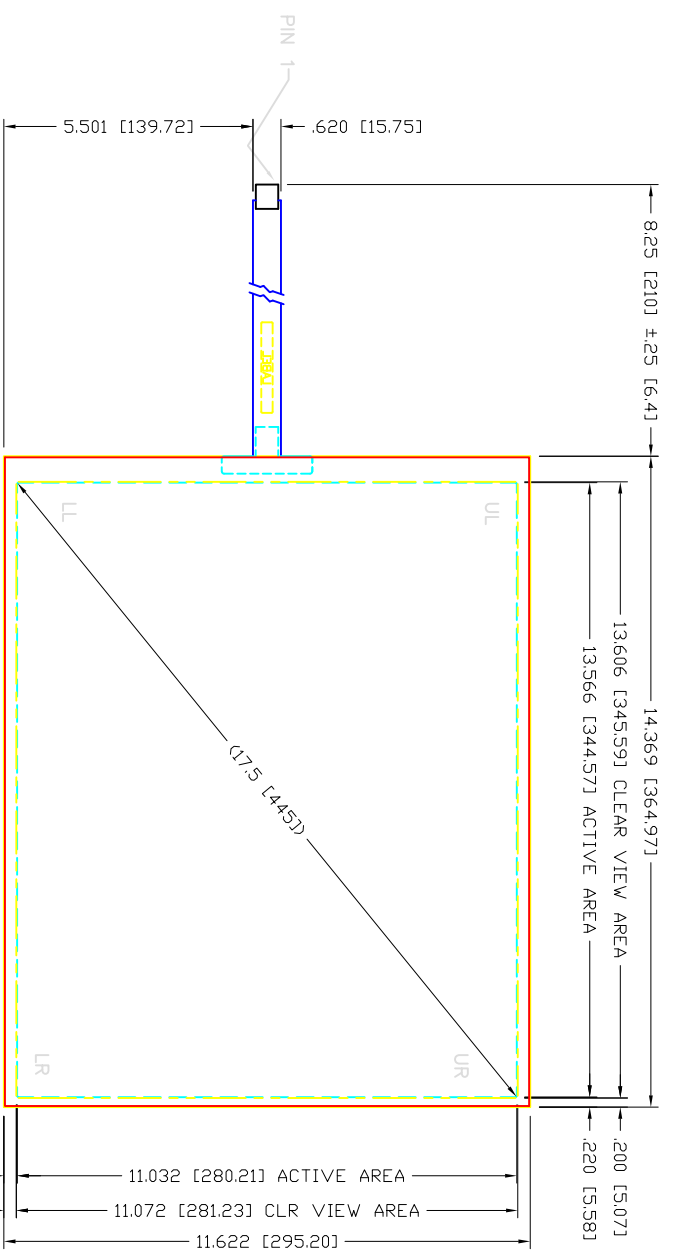

'TOUCH SIDE' VIEW

STACK-UP
CONNECTOR NOT SHOWN

PINOUT	DESCRIP
1	UR SENSE
2	LR SENSE
3	UL
4	UL
5	UL



SPACER DOT DETAIL

NOTES:

1. SPACER DOTS: .006 [.15] X .140 [3.56] (PEN/FINGER INPUT)
2. FINISH: ANTIGLARE
3. TOTAL THICKNESS: .136 [3.46] ±10%
4. FLEXTAIL: DO NOT BEND TO LESS THAN 1/8" RADIUS
5. LABEL: SERIAL NUMBER & PART NUMBER / REV. (FAR SIDE OF TAIL)
6. LABEL: T1 LABEL SPEC #6600099, TYPE 2, SIZE STANDARD (LOCATE APPROX WHERE SHOWN)
7. CONNECTOR: SR HEADER, 5 POS, .10 PITCH, AMP 487378-4
8. REFERENCE DELIVERY SPECIFICATION 6500244
9. ENVIRONMENTAL: ROHS COMPLIANT

QTY	ITEM NO	PART NUMBER	DESCRIPTION
1	7	2500127	CONNECTOR
1	6	ASD 7600100	TAIL STRAIN RELIEF
1	5	ASD 6100436	TOPSHEET SUBASSY
4	4	4600127	ZA SENSE INTERCONNECT (NOT SHOWN)
1	3	ASD 7900360	TAIL SUBASSY
1	2	ASD 3700635	GASKET SUBASSY
1	1	ASD 5800462	BOTTOM SUBASSY

DO NOT SCALE DRAWING!
UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES.
REMOVE ALL BURRS AND BREAK SHARP EDGES.
DEC. TOLERANCE:
.XX = ±.060 UNO FRACTIONAL TOL. X/X = ±1/16
.XXXX = ±.020 UNO
.XXXXX = ±.015 UNO
.XXXXXX = ±.008 UNO

TOUCH INTERNATIONAL
2222 West Rundberg Ln #100
Austin, Texas 78758
512-832-8292

NOTICE OF PROPRIETARY RIGHTS
THIS DOCUMENT, AND THE INFORMATION IT CONTAINS, IS PROPRIETARY TO TOUCH INTERNATIONAL. IT MUST NOT BE DUPLICATED, OR ITS CONTENTS USED OR DISCLOSED (IN WHOLE OR IN PART) WITHOUT WRITTEN PERMISSION FROM TOUCH INTERNATIONAL.

DRAWN DATE: R. Johnson 5/08
SCALE: NTS
SIZE: A
DVG. NO.: 48-F-5-175-001
REV.: 2.0