
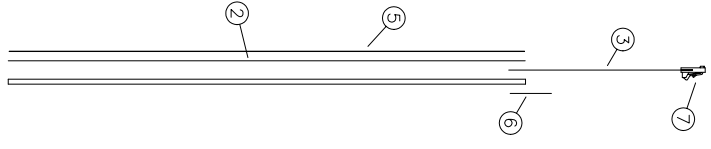


REV	DESCRIPTION	ECD #	DFT	CHK	ENG	DATE
2.2	CHANGED SPACER DOT DIAMETER: WAS .004 X .140	0506057			JH	06/02/05

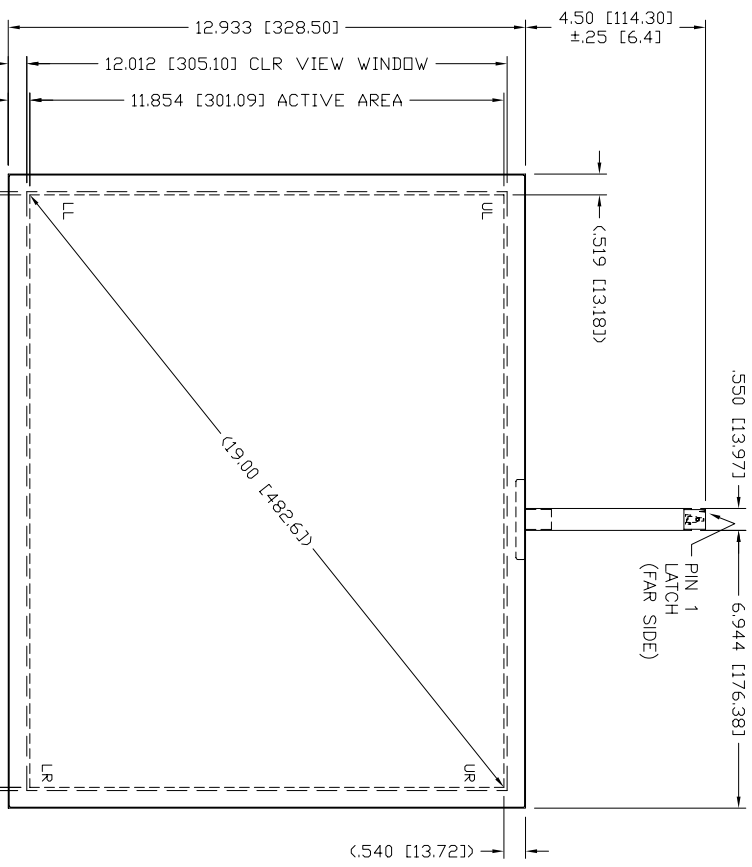

PINOUT	DESCRIP
1	UL
2	LL
3	SENSE
4	LR
5	UR

QTY	ITEM NO	PART NUMBER	DESCRIPTION
1	7	2500108	CONNECTOR
1	6	ASD 7600102	TAIL STRAIN RELIEF
1	5	ASD 6100202	TOPSHEET SUBASSY .007 THK
A/R	4	4600127	ZA SENSE INTERCONNECT (NOT SHOWN)
1	3	ASD 7900167	TAIL SUBASSY .003 THK
1	2	ASD 3700239	GASKET SUBASSY .004 THK
1	1	ASD 5800218	BOTTOM SUBASSY .125 THK

FINISHED PART # _____ NEXT ASSY # _____

DO NOT SCALE DRAWING!
 UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES.
 REMOVE ALL BURRS AND BREAK SHARP EDGES.
 DEC. TOLERANCE:
 .XX = ±.050 UNO FRACTIONAL X/X = ±1/16
 .XXX = ±.020 UNO
 .XXXX = ±.015 UNO ANGULAR TOL. = ±1°
 .XXXXX = ±.008 UNO



TOUCH INTERNATIONAL
 2222 West Rundberg Ln #100
 Austin, Texas 78758
 512-832-8292

SENSOR RES SW
 19.0 DIAG

NOTICE OF PROPRIETARY RIGHTS
 THIS DOCUMENT, AND THE INFORMATION IT CONTAINS, IS PROPRIETARY TO TOUCH INTERNATIONAL. IT MUST NOT BE DUPLICATED, OR ITS CONTENTS USED OR DISCLOSED (IN WHOLE OR IN PART) WITHOUT WRITTEN PERMISSION FROM TOUCH INTERNATIONAL.

DRAWN DATE: R. Johnson 10/04
 SCALE: NTS
 SHEET 1 OF 1
 SIZE: A
 DVG. NO: 48-F-5-190-002
 REV: 2.2
 ACAD

- NOTES:
1. SPACER DOTS: .006 [15] X .140 [3.56] (FINGER INPUT) (NOT SHOWN)
 2. TOPSHEET: ANTI-GLARE
 3. TOTAL THICKNESS: .136 [3.45] ±.10%
 4. FLEXTAIL: DO NOT BEND TO LESS THAN 1/8" RADIUS
 5. LABEL: SERIAL NUMBER & PART NUMBER / REV. (FAR SIDE OF TAIL)
 6. CONNECTOR: 5 POS, .10 PITCH, LATCH, AMP 487526-4

STACK-UP
 (CONNECTOR NOT SHOWN)