
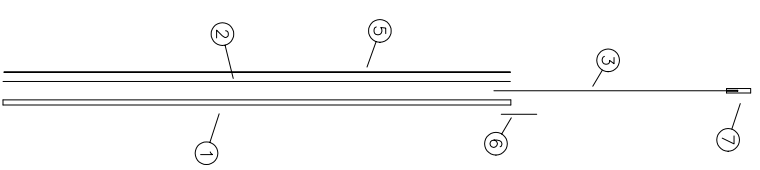


REV	DESCRIPTION	ECD #	DFT	CHK	ENG	DATE
-----	-------------	-------	-----	-----	-----	------

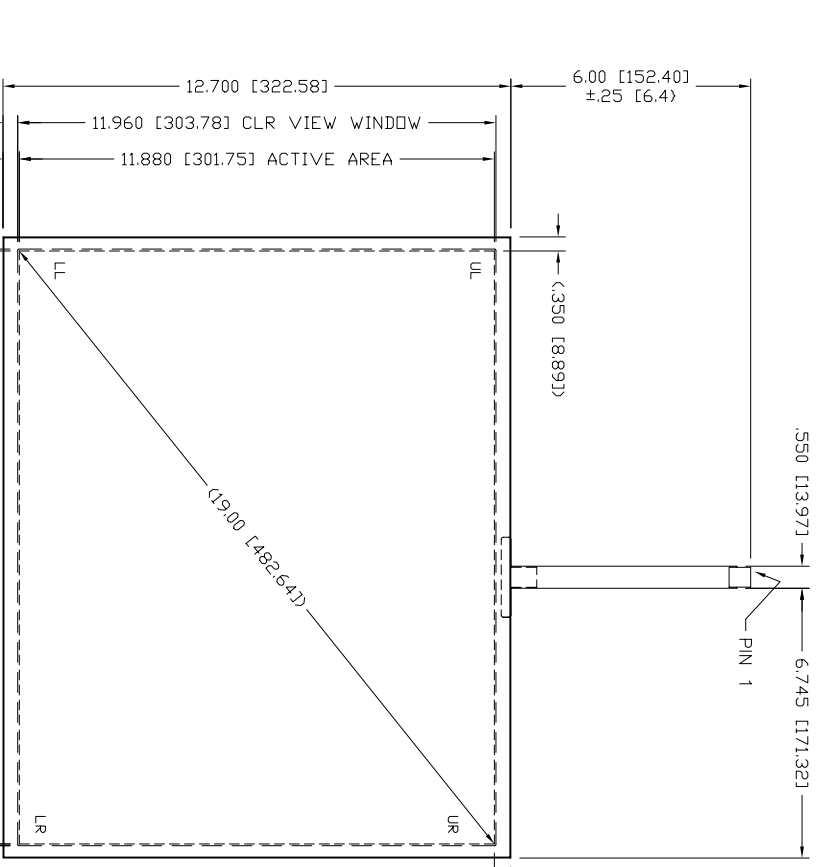

PINOUT	DESCRIP
1	UL
2	LL
3	SENSE
4	LR
5	UR

QTY	ITEM NO	PART NUMBER	DESCRIPTION
1	7	2500127	CONNECTOR
1	6	ASD 7600102	TAIL STRAIN RELIEF
1	5	ASD 6100313	TOPSHEET SUBASSY .007 THK
A/R	4	4600127	ZA SENSE INTERCONNECT (NOT SHOWN)
1	3	ASD 7900161	TAIL SUBASSY .003 THK
1	2	ASD 3700437	GASKET SUBASSY .004 THK
1	1	ASD 5800333	BOTTOM SUBASSY .125 THK

FINISHED PART # _____
 DO NOT SCALE DRAWING!
 UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES.
 REMOVE ALL BURRS AND BREAK SHARP EDGES.
 DEC. TOLERANCE:
 .XX = ±.060 UNO FRACTIONAL X/X = ±1/16
 .XXX = ±.020 UNO
 .XXXX = ±.015 UNO ANGULAR TOL. = ±1°
 .XXXXX = ±.008 UNO



TOUCH INTERNATIONAL
 2222 West Rundberg Ln #100
 Austin, Texas 78758
 512-832-8292

NOTICE OF PROPRIETARY RIGHTS THIS DOCUMENT, AND THE INFORMATION IT CONTAINS, IS PROPRIETARY TO TOUCH INTERNATIONAL. IT MUST NOT BE DUPLICATED, OR ITS CONTENTS USED OR DISCLOSED (IN WHOLE OR IN PART) WITHOUT WRITTEN PERMISSION FROM TOUCH INTERNATIONAL.	DRAWN DATE R. Johnson 9/05	TITLE SENSOR RES SW
SCALE: NTS	SIZE A	DWG. NO. 48-F-5-190-007
SHEET 1 OF 1	REV. 2.0	ACAD

- NOTES:
1. SPACER DOTS: .006 [0.15] X .140 [3.56] (FINGER INPUT) (NOT SHOWN)
 2. TOPSHEET: ANTIGLARE
 3. TOTAL THICKNESS: .136 [3.45] ±.10%
 4. FLEXTAIL: DO NOT BEND TO LESS THAN 1/8" RADIUS
 5. LABEL: SERIAL NUMBER & PART NUMBER / REV. (FAR SIDE OF TAIL)
 6. CONNECTOR: 5 POS, .10 PITCH, AMP 487378-4