




REV	DESCRIPTION	ECD #	DFT	CHK	ENG	DATE
2.1	REDESIGNED LPAT					12/09

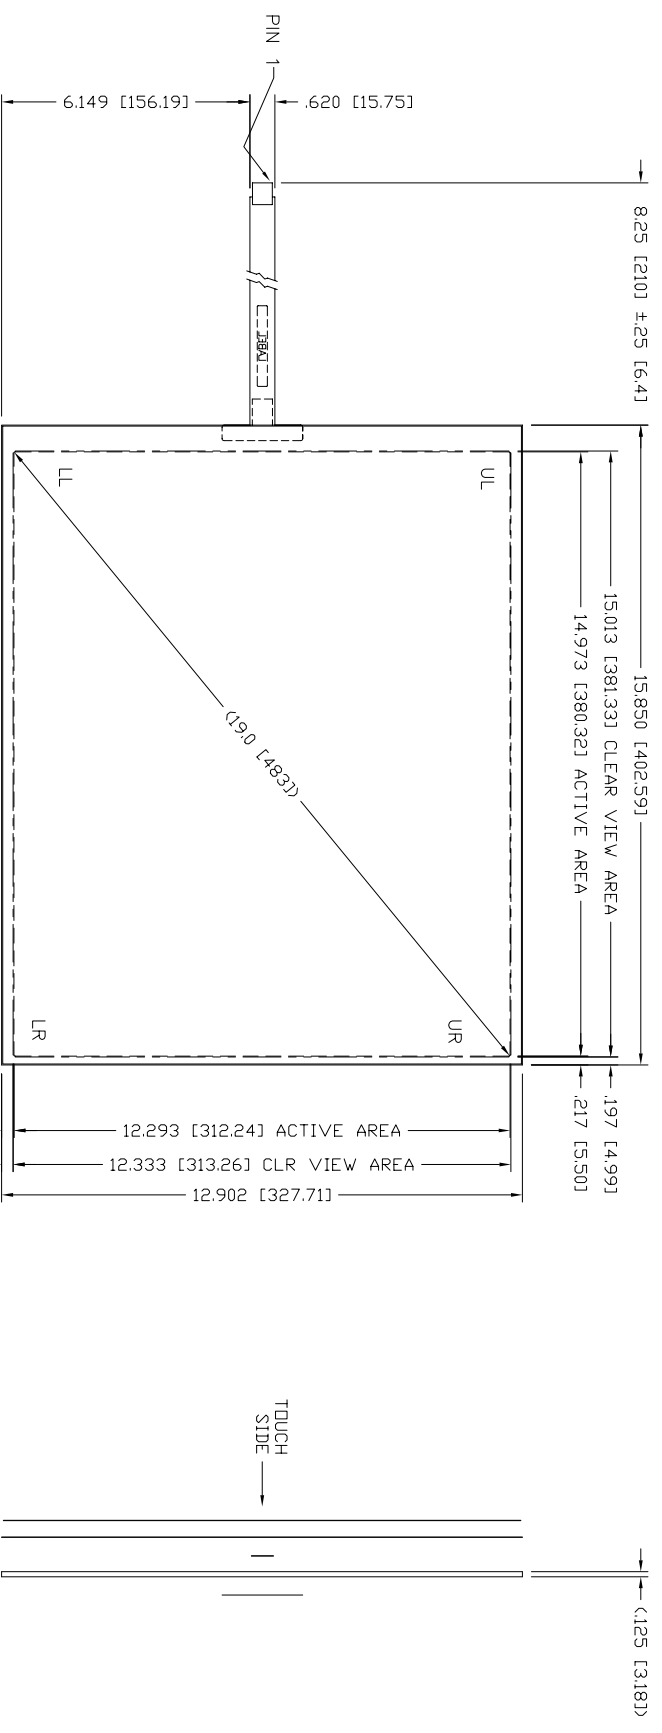

- NOTES:
1. SPACER DOTS: .006 [.15] X .140 [3.56] (PEN/FINGER INPUT)
  2. FINISH: ANTI-GLARE
  3. TOTAL THICKNESS: .136 [3.46] ±.10%
  4. FLEX-TAIL: DO NOT BEND TO LESS THAN 1/8" RADIUS
  5. LABEL: SERIAL NUMBER & PART NUMBER / REV. (FAR SIDE OF TAIL)
  6. CONNECTOR: SR HEADER, 5 POS., .10 PITCH, AMP 487378-4
  7. REFERENCE DELIVERY SPECIFICATION 6500244
  8. ENVIRONMENTAL: ROHS COMPLIANT

QTY	ITEM NO	PART NUMBER	DESCRIPTION
1	7	2500127	CONNECTOR
1	6	ASD 7600100	TAIL STRAIN RELIEF
1	5	ASD 6100438	TOPSHEET SUBBASSY
A/R	4	4600127	ZA SENSE INTERCONNECT (NOT SHOWN)
1	3	ASD 7900360	TAIL SUBBASSY
1	2	ASD 3700637	GASKET SUBBASSY
1	1	ASD 5800464	BOTTOM SUBBASSY

FINISHED PART #	DO NOT SCALE DRAWING!
	UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES. REMOVE ALL BURRS AND BREAK SHARP EDGES.
	DEC. TOLERANCE:
	.XX = ±.060 UNO FRACTIONAL TOL. X/X = ±1/16
	.XXX = ±.020 UNO
	.XXXX = ±.015 UNO ANGULAR TOL. = ±1°
	.XXXXX = ±.008 UNO

SCALE: NTS	SIZE	DWG. NO.	REV.
A	A	48-F-5-190-008	2.1