


REV	DESCRIPTION	ECD #	DFT	CHK	ENG	DATE
2.2	CHANGED PINOUT	0504053	JH			5/12/05

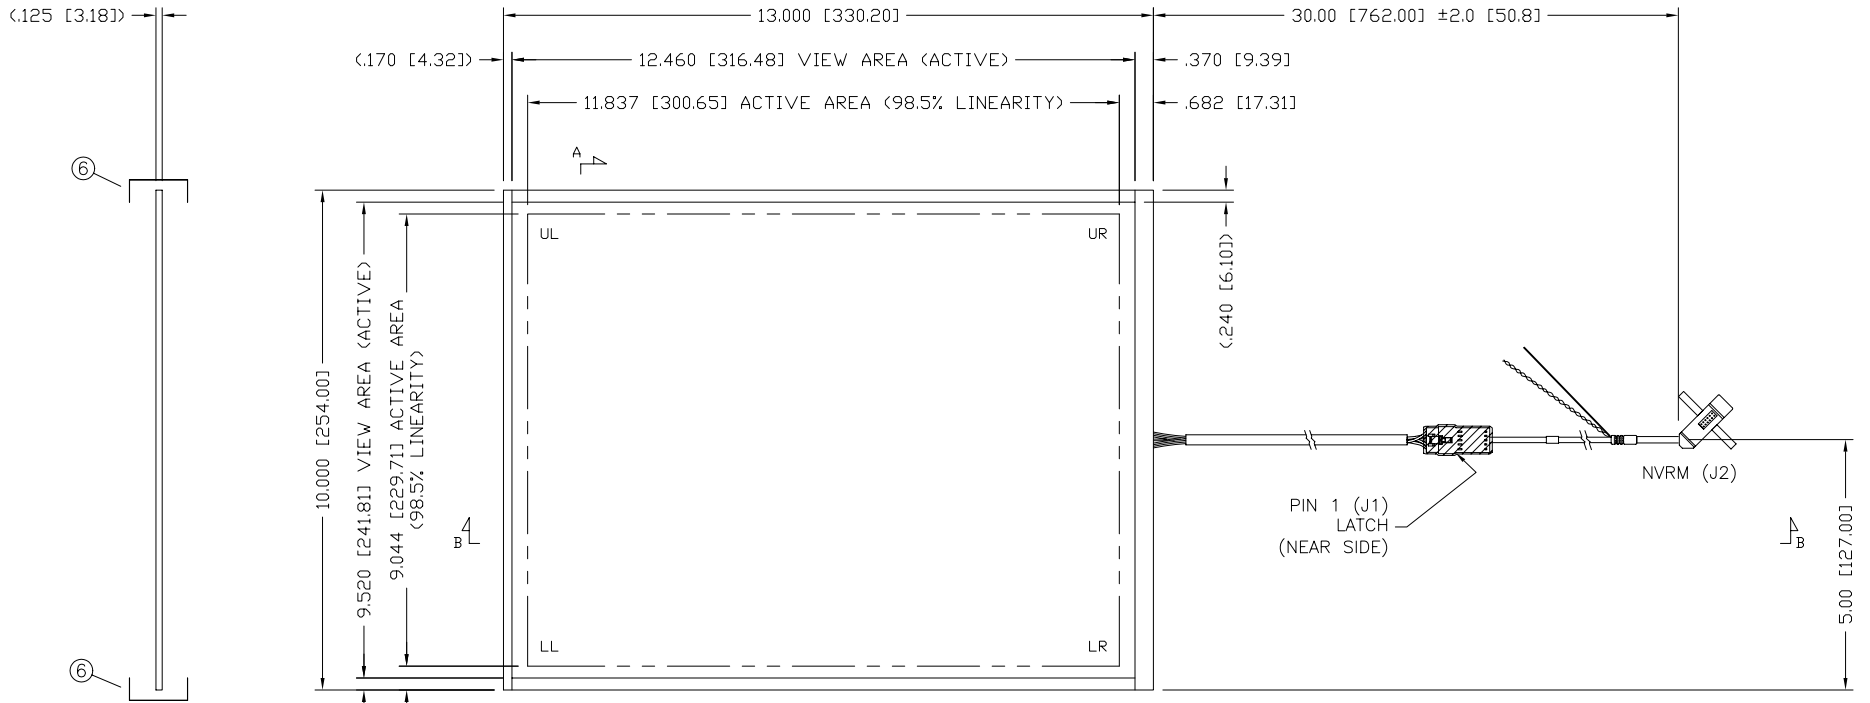

SECT. A-A
STACK-UP
(CABLE & CONNECTORS
NOT SHOWN)

SECT. B-B
STACK-UP

J1 PINOUT	
PIN	DESCRIP
5	UR
4	UL
3	SENSE/NC
2	LL
1	LR

J2 PINOUT	
PIN	DESCRIP
8	DRIVE 1
9	SHIELD
10	UR
11	LR
12	UL
	LL

1.4	8	1600138	HEATSHRINK, .75
1	7	7900101	NOVRAM 7"
52.0	6	8200100	TAPE, KAPTON, .50
20.0	5	8200110	TAPE, KAPTON, .25
10.0	4	8200106	TAPE, KAPTON, .75
A/R	3	7300100	SOLDER (NOT SHOWN)
1	2	7900102	TAIL SUBASSY
1	1	4000114	BOTTOM SUBASSY .125 THK
QTY	ITEM NO	PART NUMBER	DESCRIPTION

FINISHED PART #

NEXT ASSY #

DO NOT SCALE DRAWING !

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES.
REMOVE ALL BURRS AND BREAK SHARP EDGES.

DEC. TOLERANCE:

.XX = ±.060 UNO FRAC. TOL. x/x = ±1/16
.XXX = ±.030 UNO ANGULAR TOL. = ±1'
.XXXX = ±.015 UNO
.XXXXX = ±.008 UNO

NOTICE OF PROPRIETARY RIGHTS

THIS DOCUMENT, AND THE INFORMATION IT CONTAINS, IS PROPRIETARY TO TOUCH INTERNATIONAL. IT MUST NOT BE DUPLICATED, OR ITS CONTENTS USED OR DISCLOSED (IN WHOLE OR IN PART) WITHOUT WRITTEN PERMISSION FROM TOUCH INTERNATIONAL.



TOUCH INTERNATIONAL
2222 West Rundberg Ln #100
Austin, Texas 78758
512-832-8292

TITLE:
SENSOR CAP 5W
15.0 DIAG W/ NVRM

DRAWN DATE
JH 5/04

SCALE: NTS

SIZE DWG. NO.

SHEET 1 OF 1

57-150FA-061-1

REV.

2.2

NOTES:

- TOTAL THICKNESS: .180 [4.6] ±10%
- LABEL: SERIAL NUMBER & PART NUMBER / REV
- CONNECTOR(J1): 5 POS, .10 PITCH, LATCH, AMP 104257-4
- VLT @83% OR GREATER
- OPERATING TEMP: -20°C TO +70°C, 5% TO 90% RH
- STORAGE TEMP: -50°C TO +85°C, <35% RH
- ETCH FINISH: AGO