



REV	DESCRIPTION	ECD #	DFT	CHK	ENG	DATE
2.1	ADDED CABLE COLOR TO PINOUT CHART	0703174	S.S.R.			4/17/07

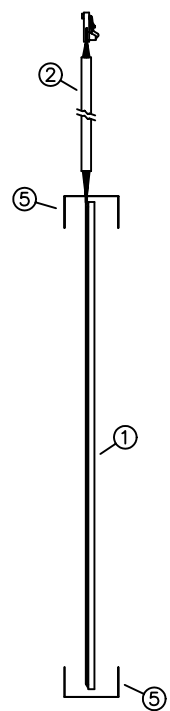

PINOUT	
PIN	DESCRIP
1 (RED)	UL
2 (GREEN)	UR
3 (ORANGE)	SENSE/NC
4 (BLACK)	LR
5 (WHITE)	LL

QTY	ITEM NO	PART NUMBER	DESCRIPTION
36.0	5	8200104	TAPE, KAPTON, 1.0
10.1	4	8200106	TAPE, KAPTON, .75
A/R	3	7300100	SOLDER (NOT SHOWN)
1	2	7900219	TAIL SUBASSY
1	1	4000202	BOTTOM SUBASSY .125 THK

FINISHED PART #		NEXT ASSY #	
DO NOT SCALE DRAWING !			
UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES. REMOVE ALL BURRS AND BREAK SHARP EDGES.			
DEC. TOLERANCE:			
.XX = ±.060 UNO	FRAC. TOL. X/X = ±1/16		
.XXX = ±.030 UNO	ANGULAR TOL. = ±1°		
.XXXX = ±.015 UNO			
.XXXXX = ±.008 UNO			
NOTICE OF PROPRIETARY RIGHTS		 <p>TOUCH INTERNATIONAL 2222 West Rundberg Ln #100 Austin, Texas 78758 512-832-8292</p>	
THIS DOCUMENT, AND THE INFORMATION IT CONTAINS, IS PROPRIETARY TO TOUCH INTERNATIONAL. IT MUST NOT BE DUPLICATED, OR ITS CONTENTS USED OR DISCLOSED (IN WHOLE OR IN PART) WITHOUT WRITTEN PERMISSION FROM TOUCH INTERNATIONAL.			
DRAWN DATE R. Johnson 5/04		TITLE: SENSOR CAP 5W 15.0 DIAG	
SCALE: NTS	SIZE: A	DWG. NO.: 57-150FA-071	REV.: 2.1
SHEET 1 OF 1		ACAD	

- NOTES:
- TOTAL THICKNESS: .180 [4.6] ±10%
 - LABEL: SERIAL NUMBER & PART NUMBER / REV. (FAR SIDE OF TAIL)
 - CONNECTOR: 5 POS, .10 PITCH, LATCH, AMP 487526-4
 - VLT @80% OR GREATER
 - OPERATING TEMP: -20°C TO +70°C, 5% TO 90% RH
 - STORAGE TEMP: -50°C TO +85°C, <35% RH
 - ETCH FINISH: AGO