


REV	DESCRIPTION	ECD #	DFT	CHK	ENG	DATE
2.3	CHANGED TAIL. WAS: 7900103	0506058			JH	6/6/05

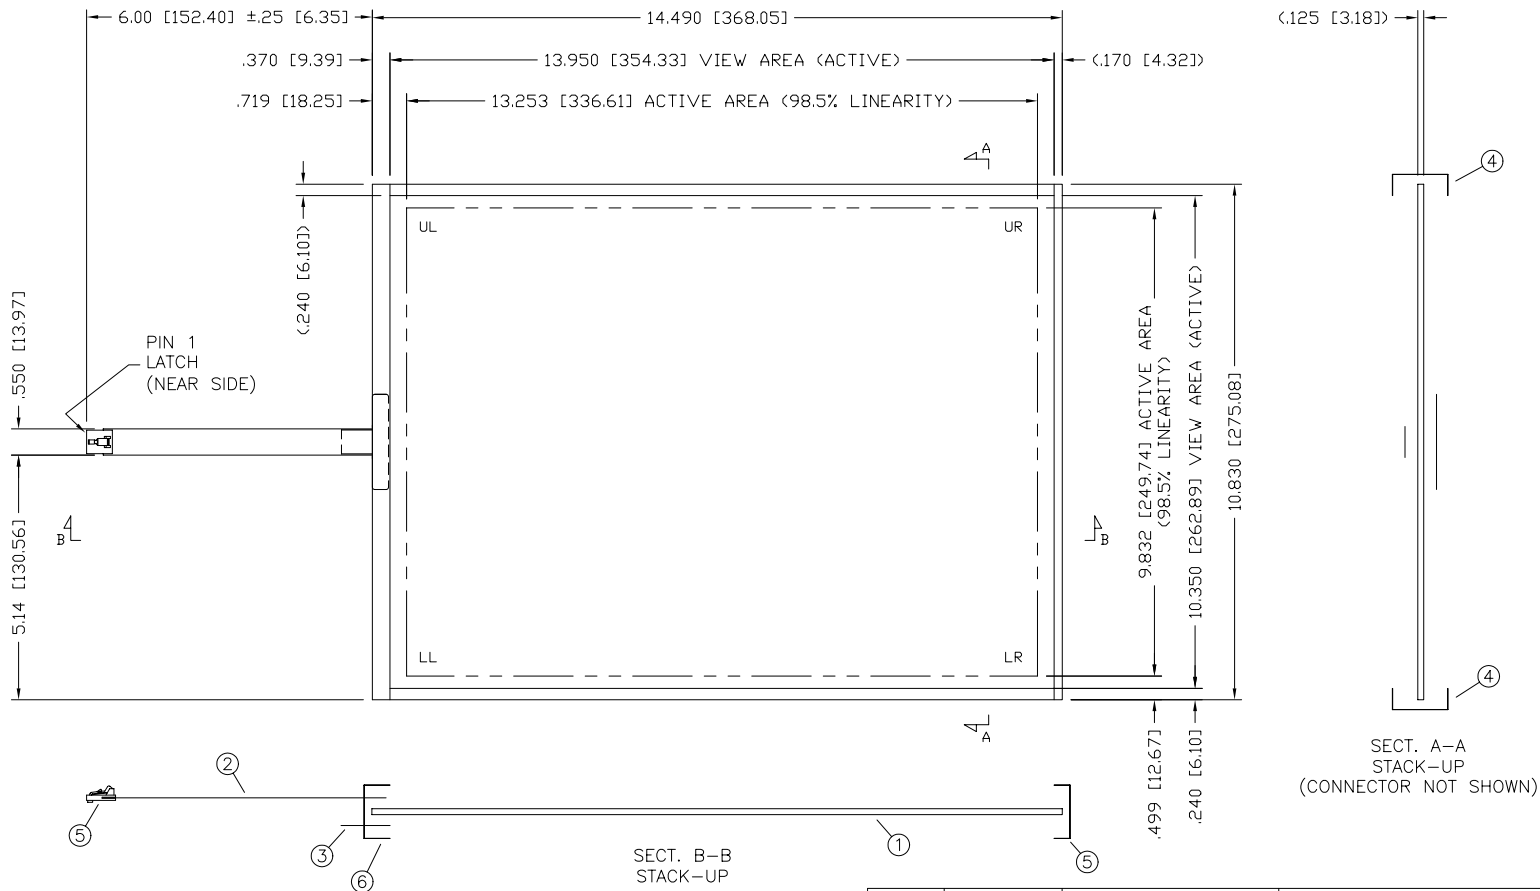

PINOUT	
PIN	DESCRIP
1	UL
2	UR
3	SENSE/NC
4	LR
5	LL

- NOTES:
- TOTAL THICKNESS: .128 [3.25] ±10%
 - FLEXTAIL: DO NOT BEND TO LESS THAN 1/8" RADIUS
 - LABEL: SERIAL NUMBER & PART NUMBER / REV. (FAR SIDE OF TAIL)
 - CONNECTOR: 5 POS, .10 PITCH, LATCH, AMP 487526-4
 - VLT @83% OR GREATER
 - OPERATING TEMP: -20°C TO +70°C, 5% TO 90% RH
 - STORAGE TEMP: -50°C TO +85°C, <35% RH

1	7	2500108	CONNECTOR
11.0	6	8200106	TAPE, KAPTON, .75
22.0	5	8200110	TAPE, KAPTON, .25
58.0	4	8200100	TAPE, KAPTON, .50
1	3	7600102	TAIL STRAIN RELIEF
1	2	7900223	TAIL SUBASSY
1	1	4000117	BOTTOM SUBASSY .125 THK

QTY	ITEM NO	PART NUMBER	DESCRIPTION
FINISHED PART #		NEXT ASSY #	

DO NOT SCALE DRAWING !
 UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES. REMOVE ALL BURRS AND BREAK SHARP EDGES.
 DEC. TOLERANCE:
 .XX = ±.060 UNO FRACTIONAL TOL. x/x = ±1/16
 .XXX = ±.030 UNO ANGULAR TOL. = ±1'
 .XXXX = ±.015 UNO
 .XXXXX = ±.008 UNO

TOUCH INTERNATIONAL
 2222 West Rundberg Ln #100
 Austin, Texas 78758
 512-832-8292

NOTICE OF PROPRIETARY RIGHTS		DRAWN DATE	
THIS DOCUMENT, AND THE INFORMATION IT CONTAINS, IS PROPRIETARY TO TOUCH INTERNATIONAL. IT MUST NOT BE DUPLICATED, OR ITS CONTENTS USED OR DISCLOSED (IN WHOLE OR IN PART) WITHOUT WRITTEN PERMISSION FROM TOUCH INTERNATIONAL.		R. Johnson 5/04	
SHEET 1 OF 1		SCALE: NTS	REV. 2.3
SIZE A		DWG. NO. 57-170FA-002	