
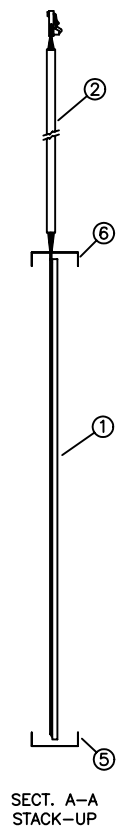


REV	DESCRIPTION	ECD #	DFT	CHK	ENG	DATE
2.1	ADDED CABLE COLOR TO PINOUT CHART	0703174	S.S.R.			4/17/07

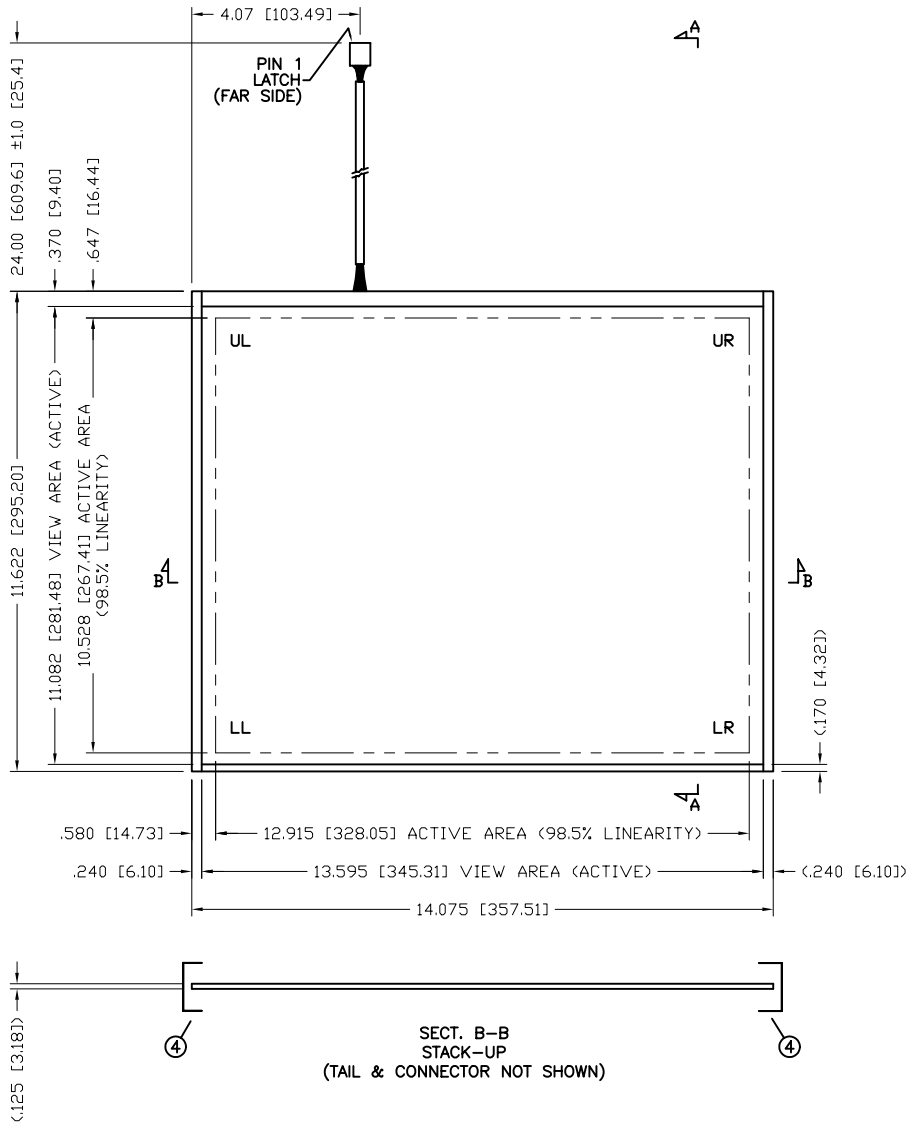

PINOUT	
PIN	DESCRIP
1 (RED)	UL
2 (GREEN)	UR
3 (ORANGE)	SENSE/NC
4 (BLACK)	LR
5 (WHITE)	LL

14.0	6	8200106	TAPE, KAPTON, .75
28.0	5	8200110	TAPE, KAPTON, .25
46.5	4	8200100	TAPE, KAPTON, .50
A/R	3	7300100	SOLDER (NOT SHOWN)
1	2	7900102	TAIL SUBASSY
1	1	4000200	BOTTOM SUBASSY .125 THK

QTY	ITEM NO	PART NUMBER	DESCRIPTION
-----	---------	-------------	-------------

FINISHED PART #	NEXT ASSY #
-----------------	-------------

DO NOT SCALE DRAWING !
 UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES. REMOVE ALL BURRS AND BREAK SHARP EDGES.
 DEC. TOLERANCE:
 .XX = ±.060 UNO FRAC. TOL. X/X = ±1/16
 .XXX = ±.030 UNO
 .XXXX = ±.015 UNO ANGULAR TOL. = ±1°
 .XXXXX = ±.008 UNO



TOUCH INTERNATIONAL
 2222 West Rundberg Ln #100
 Austin, Texas 78758
 512-832-8292

NOTICE OF PROPRIETARY RIGHTS		DRAWN DATE	SCALE	SIZE	DWG. NO.	REV.
THIS DOCUMENT, AND THE INFORMATION IT CONTAINS, IS PROPRIETARY TO TOUCH INTERNATIONAL. IT MUST NOT BE DUPLICATED, OR ITS CONTENTS USED OR DISCLOSED (IN WHOLE OR IN PART) WITHOUT WRITTEN PERMISSION FROM TOUCH INTERNATIONAL.		JH 3/05	NTS	A	57-170FA-031	2.1

- NOTES:
- TOTAL THICKNESS: .180 [4.6] ±10%
 - LABEL: SERIAL NUMBER & PART NUMBER / REV. (FAR SIDE OF TAIL)
 - CONNECTOR: 5 POS, .10 PITCH, LATCH, AMP 104257-4
 - VLT @83% OR GREATER
 - OPERATING TEMP: -20°C TO +70°C, 5% TO 90% RH
 - STORAGE TEMP: -50°C TO +85°C, <35% RH
 - ETCH FINISH: AGO