


REV	DESCRIPTION	ECD #	DFT	CHK	ENG	DATE
-----	-------------	-------	-----	-----	-----	------

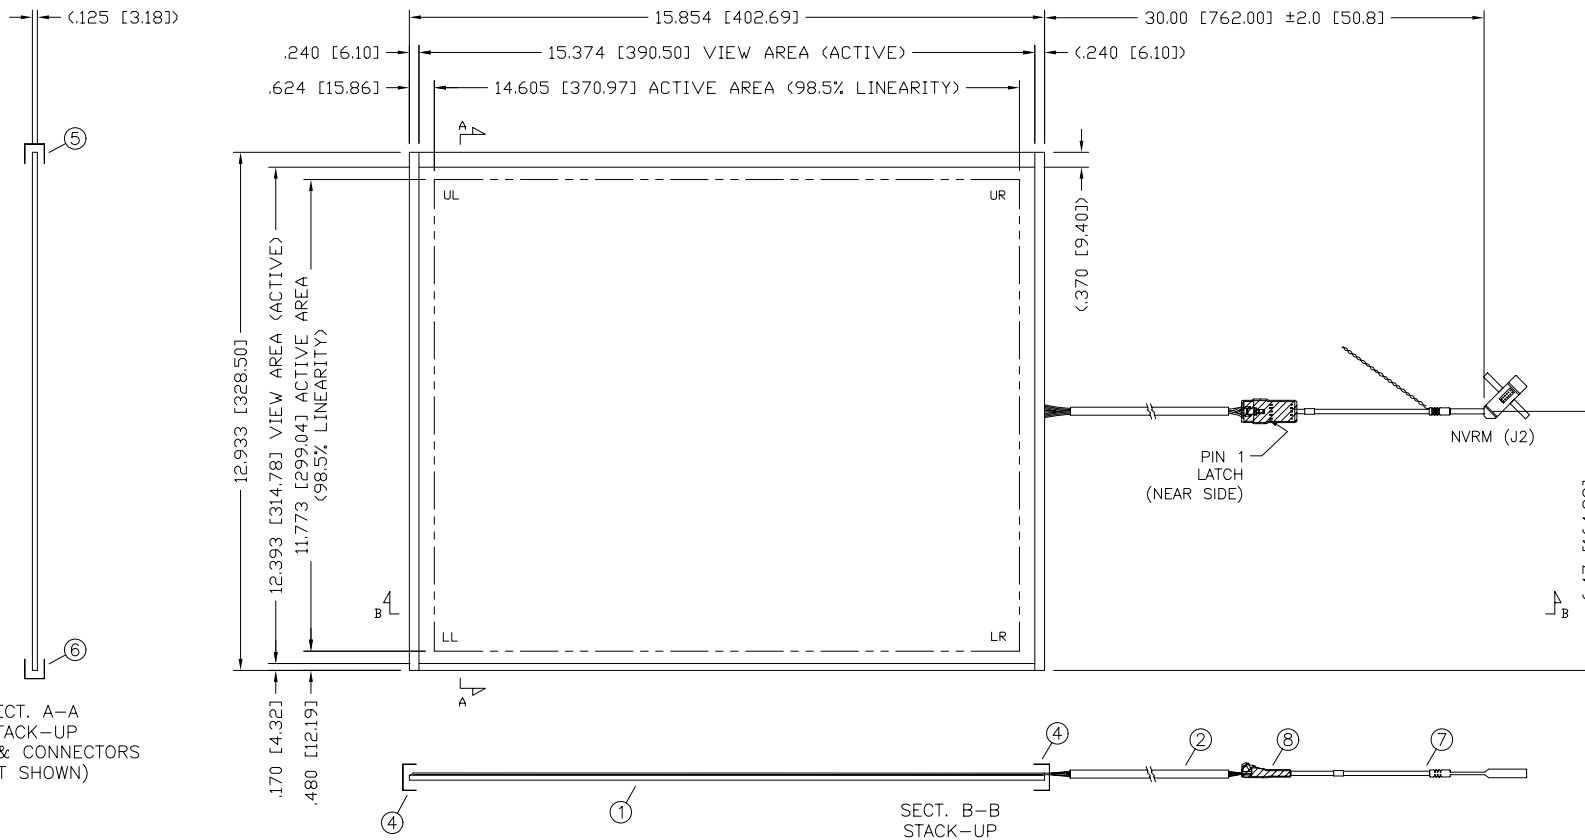

SECT. A-A
STACK-UP
(CABLE & CONNECTORS
NOT SHOWN)

SECT. B-B
STACK-UP

J1 PINOUT	
PIN	DESCRIP
5	UR
4	UL
3	SENSE/NC
2	LL
1	LR

J2 PINOUT	
PIN	DESCRIP
8	DRIVE 1
8	SHIELD
9	UR
10	LR
11	UL
12	LL

NOTES:

- TOTAL THICKNESS: .180 [4.57] ±10%
- LABEL: SERIAL NUMBER & PART NUMBER / REV.
- CONNECTOR(J1): 5 POS, .10 PITCH, LATCH, AMP 487526-4
- VLT @80% OR GREATER
- OPERATING TEMP: -20°C TO +70°C, 5% TO 90% RH
- STORAGE TEMP: -50°C TO +85°C, <35% RH
- ETCH FINISH: AGO

1.4	8	1600138	HEATSHRINK, .75
1	7	7900101	NOVDRAM, 7"
32.0	6	8200110	TAPE, KAPTON .25
16.0	5	8200106	TAPE, KAPTON .75
52.0	4	8200100	TAPE, KAPTON .50
1	3	7300100	SOLDER (NOT SHOWN)
1	2	7900102	TAIL SUBASSY
1	1	4000201	BOTTOM SUBASSY .125 THK
QTY	ITEM NO	PART NUMBER	DESCRIPTION

FINISHED PART #

NEXT ASSY #

DO NOT SCALE DRAWING !
UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES. REMOVE ALL BURRS AND BREAK SHARP EDGES.
DEC. TOLERANCE:
.XX = ±.060 UNO FRAC. TOL. x/x = ±1/16
.XXX = ±.030 UNO ANGULAR TOL. = ±1°
.XXXX = ±.015 UNO
.XXXXX = ±.008 UNO



TOUCH INTERNATIONAL
2222 West Rundberg Ln #100
Austin, Texas 78758
512-832-8292

NOTICE OF PROPRIETARY RIGHTS
THIS DOCUMENT, AND THE INFORMATION IT CONTAINS, IS PROPRIETARY TO TOUCH INTERNATIONAL. IT MUST NOT BE DUPLICATED, OR ITS CONTENTS USED OR DISCLOSED (IN WHOLE OR IN PART) WITHOUT WRITTEN PERMISSION FROM TOUCH INTERNATIONAL.

DRAWN DATE
R. Johnson 12/05

TITLE:
SENSOR CAP 5W
19.0 DIAG W/ NVRM

SCALE: NTS	SIZE	DWG. NO.	REV.
SHEET 1 OF 1	A	57-190FA-071-1	2.0