REV	DESCRIPTION	ECO #	DFT	CHK	ENG	DATE
2.1	ADDED CABLE COLOR TO PINOUT CHART	0703174	S.S.R.			4/17/07

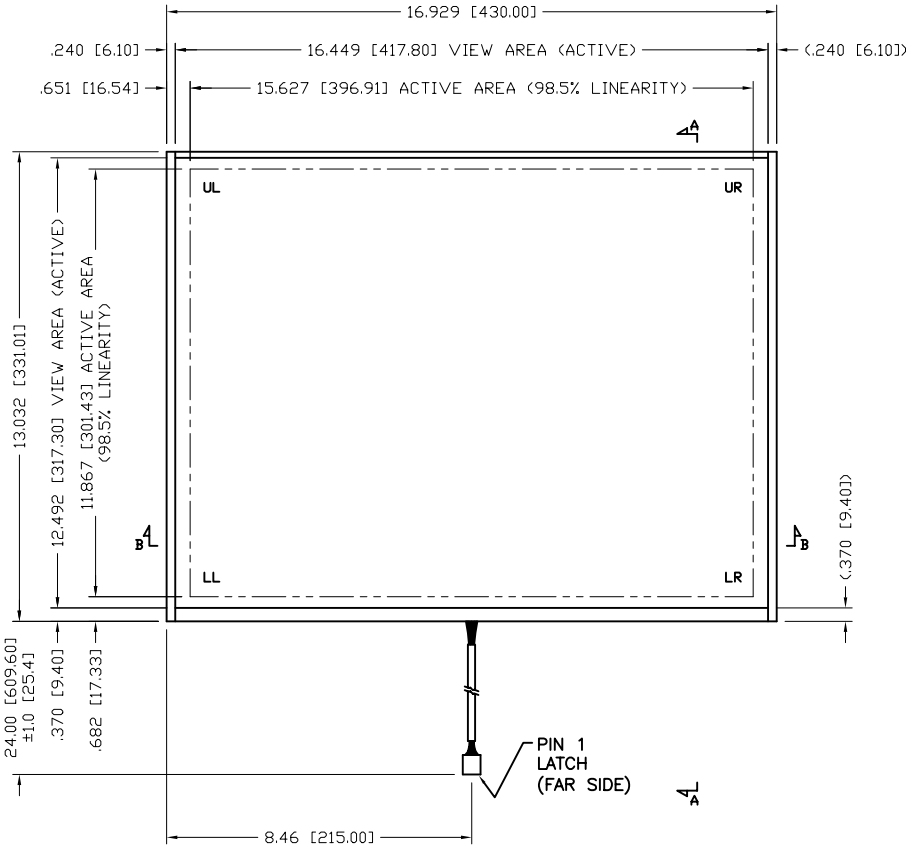



SECT. B–B
STACK–UP
CABLE & CONNECTOR NOT SHOWN



STACK–UP
SECT. A–A

PINOUT	
PIN	DESCRIP
1 (RED)	UL
2 (GREEN)	UR
3 (ORANGE)	SENSE/NC
4 (BLACK)	LR
5 (WHITE)	LL

NOTES:

1. TOTAL THICKNESS: .180 [4.6] ±10%
2. LABEL: SERIAL NUMBER & PART NUMBER / REV. (FAR SIDE OF TAIL)
3. CONNECTOR: 5 POS, .10 PITCH, LATCH, AMP 487526–4
4. VLT @80% OR GREATER
5. OPERATING TEMP: –20°C TO +70°C, 5% TO 90% RH
6. STORAGE TEMP: –50°C TO +85°C, <35% RH
7. ETCH FINISH: AGO

QTY	ITEM NO	PART NUMBER	DESCRIPTION
17.0	6	8200106	TAPE, KAPTON, .75
34.0	5	8200110	TAPE, KAPTON, .25
52.4	4	8200100	TAPE, KAPTON, .50
1	3	7300100	SOLDER (NOT SHOWN)
1	2	7900102	TAIL SUBASSY
1	1	4000199	BOTTOM SUBASSY .125 THK

FINISHED PART #

NEXT ASSY #

DO NOT SCALE DRAWING !

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES.
REMOVE ALL BURRS AND BREAK SHARP EDGES.
DEC. TOLERANCE:
.XX = ±.060 UNO
.XXX = ± .030 UNO
.XXXX = ± .015 UNO
.XXXXX = ±.008 UNO
FRAC. TOL. X/X = ±1/16
ANGULAR TOL. = ±1°

NOTICE OF PROPRIETARY RIGHTS

THIS DOCUMENT, AND THE INFORMATION IT CONTAINS, IS PROPRIETARY TO TOUCH INTERNATIONAL. IT MUST NOT BE DUPLICATED, OR ITS CONTENTS USED OR DISCLOSED (IN WHOLE OR IN PART) WITHOUT WRITTEN PERMISSION FROM TOUCH INTERNATIONAL.

DRAWN RWJ DATE 5/06

SCALE: NTS

SHEET 1 OF 1

TOUCH INTERNATIONAL
2222 West Rundberg Ln #100
Austin, Texas 78758
512–832–8292

TITLE:
SENSOR CAP 5W
20.0 DIAG

SIZE	DWG. NO.	REV.
A	57–200FA–051	2.1

ACAD