
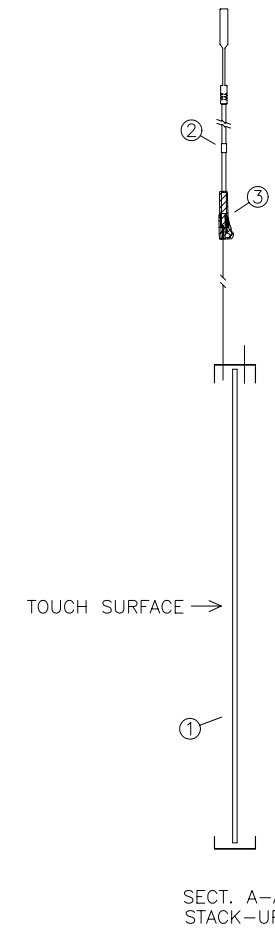


REV	DESCRIPTION	ECD #	DFT	CHK	ENG	DATE
-----	-------------	-------	-----	-----	-----	------

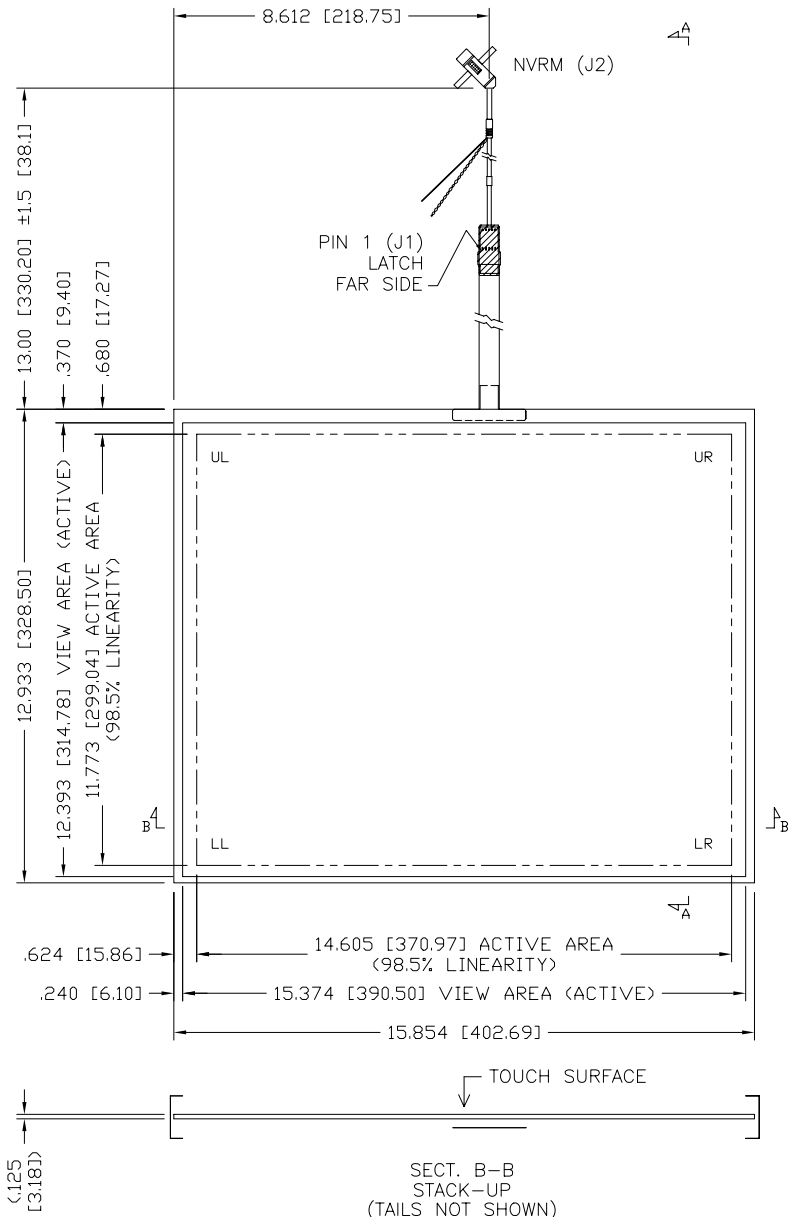


J1 PINOUT	
PIN	DESCRIP
1	LL
2	LR
3	SHIELD
4	UR
5	UL

J2 PINOUT	
PIN	DESCRIP
8	DRIVE 1
8	SHIELD
9	UR
10	LR
11	UL
12	LL

- NOTES:
- TOTAL THICKNESS: .131 [3.33] ±10% (.141 [3.58] @ TAIL INTERCONNECT AREA)
  - FLEXTAIL: DO NOT BEND TO LESS THAN 1/8" RADIUS
  - LABEL: SERIAL NUMBER & PART NUMBER / REV. (FAR SIDE OF TAIL)
  - CONNECTOR(J1): 5 POS, .10 PITCH, LATCH, AMP 487526-4
  - VLT @80% OR GREATER
  - OPERATING TEMP: -20°C TO +70°C, 5% TO 90% RH
  - STORAGE TEMP: -50°C TO +85°C, <35% RH
  - 1/2 WAVE BACK COATED W/ BACK EMI BUSBAR
  - ETCH FINISH: AGO

1.4	3	1600138	HEATSHRINK
1	2	7900101	NOVARAM 7"
1	1	59-190FA-002	SENSOR CAP 5W 19.0 DIAG 1/2 WAVE BACK COAT
QTY	ITEM NO	PART NUMBER	DESCRIPTION

FINISHED PART #		NEXT ASSY #	
<b>DO NOT SCALE DRAWING !</b>			
UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES. REMOVE ALL BURRS AND BREAK SHARP EDGES.			
DEC. TOLERANCE:			
.XX = ±.060 UNO		FRAC. TOL. x/x = ±1/16	
.XXX = ±.050 UNO		ANGULAR TOL. = ±1°	
.XXXX = ±.030 UNO		.XXXXX = ±.008 UNO	
NOTICE OF PROPRIETARY RIGHTS			
THIS DOCUMENT, AND THE INFORMATION IT CONTAINS, IS PROPRIETARY TO TOUCH INTERNATIONAL. IT MUST NOT BE DUPLICATED, OR ITS CONTENTS USED OR DISCLOSED (IN WHOLE OR IN PART) WITHOUT WRITTEN PERMISSION FROM TOUCH INTERNATIONAL.			
DRAWN DATE R. Johnson 3/06		 <p><b>TOUCH INTERNATIONAL</b> 2222 West Rundberg Ln #100 Austin, Texas 78758 512-832-8292</p>	
SCALE: NTS			
SHEET 1 OF 1		SIZE A	DWG. NO. 59-190FA-002-1
		REV. 2.0	