


REV	DESCRIPTION	ECD #	DFT	CHK	ENG	DATE
2.3	CHANGED PINOUT	0504055	JH			5/12/05
2.4	ADDED CABLE COLOR TO PINOUT CHART	0703174	S.S.R.			4/17/07

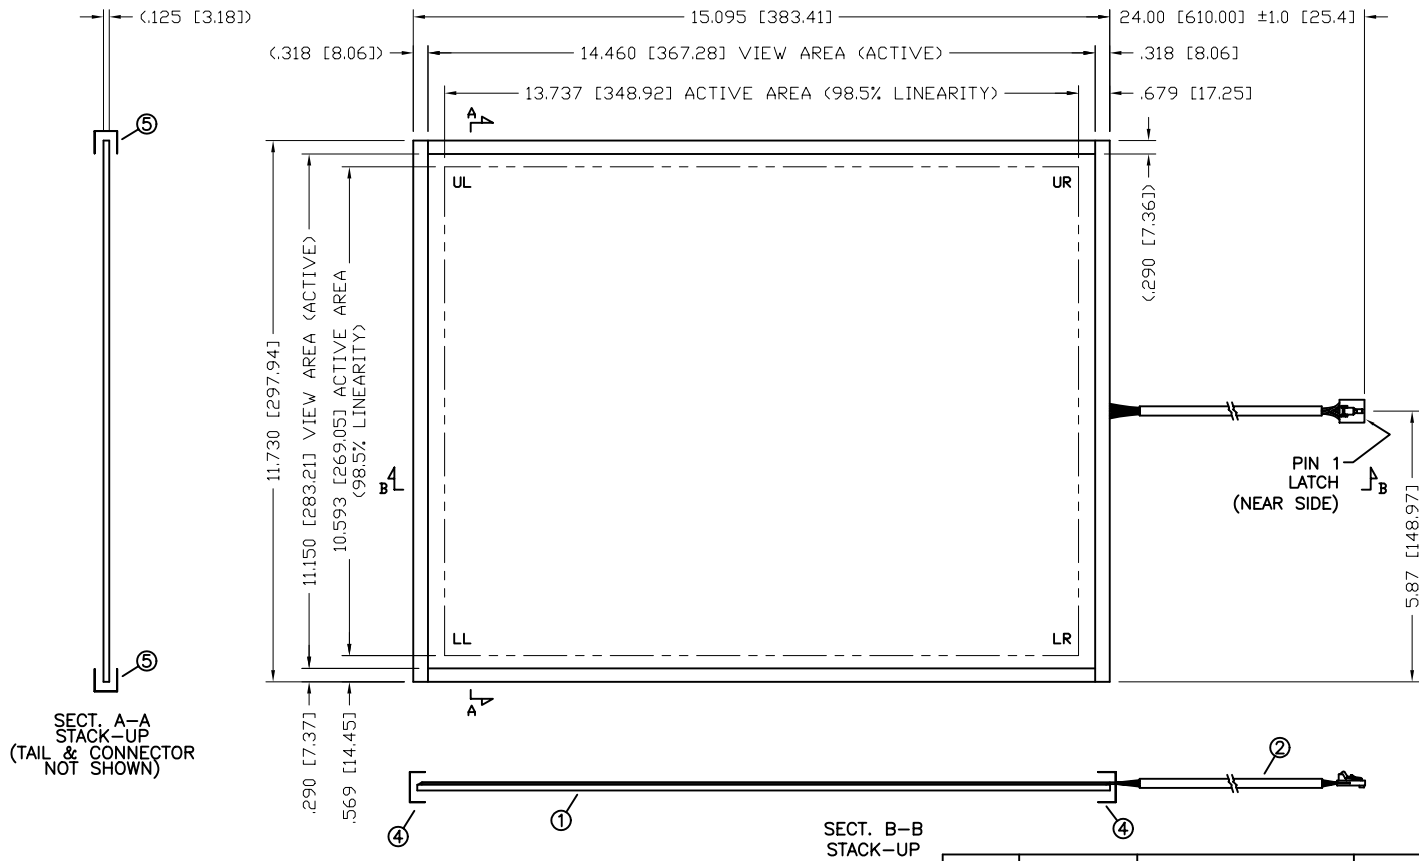


SECT. A-A  
STACK-UP  
(TAIL & CONNECTOR  
NOT SHOWN)

SECT. B-B  
STACK-UP

PINOUT	
PIN	DESCRIP
5 (WHITE)	LL
4 (BLACK)	LR
3 (ORANGE)	SENSE/NC
2 (GREEN)	UR
1 (RED)	UL

- NOTES:
- TOTAL THICKNESS: .180 [4.6] ±10%
  - LABEL: SERIAL NUMBER & PART NUMBER / REV.
  - CONNECTOR: 5 POS, .10 PITCH, LATCH, AMP 104257-4
  - VLT @83% OR GREATER
  - OPERATING TEMP: -20°C TO +70°C, 5% TO 90% RH
  - STORAGE TEMP: -50°C TO +85°C, <35% RH
  - ETCH FINISH: AGO

60.0	5	8200100	TAPE, KAPTON, .50
23.5	4	8200106	TAPE, KAPTON, .75
A/R	3	7300100	SOLDER (NOT SHOWN)
1	2	7900102	TAIL SUBASSY
1	1	4000119	BOTTOM SUBASSY .125 THK
QTY	ITEM NO	PART NUMBER	DESCRIPTION

FINISHED PART #		NEXT ASSY #	
DO NOT SCALE DRAWING ! UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES. REMOVE ALL BURRS AND BREAK SHARP EDGES. DEC. TOLERANCE: .XX = ±.060 UNO FRAC. TOL. X/X = ±1/16 .XXX = ±.030 UNO .XXXX = ±.015 UNO ANGULAR TOL. = ±1° .XXXXX = ±.008 UNO		 <p>TOUCH INTERNATIONAL 2222 West Rundberg Ln #100 Austin, Texas 78758 512-832-8292</p>	TITLE: SENSOR CAP 5W 18.1 DIAG
NOTICE OF PROPRIETARY RIGHTS THIS DOCUMENT, AND THE INFORMATION IT CONTAINS, IS PROPRIETARY TO TOUCH INTERNATIONAL. IT MUST NOT BE DUPLICATED, OR ITS CONTENTS USED OR DISCLOSED (IN WHOLE OR IN PART) WITHOUT WRITTEN PERMISSION FROM TOUCH INTERNATIONAL.			DRAWN DATE R Johnson 3/04
SHEET 1 OF 1		DWG. NO. 57-181FA-001	REV. 2.4