


# 88-F-PMC-150-MDL-01

## Extreme Touch Projected Capacitive Module

Touch International's 88-F-PMC-150-MDL-01 projected capacitive module is equipped with a general purpose projected capacitive controller and touch screen mounted to a 15.0" LCD.

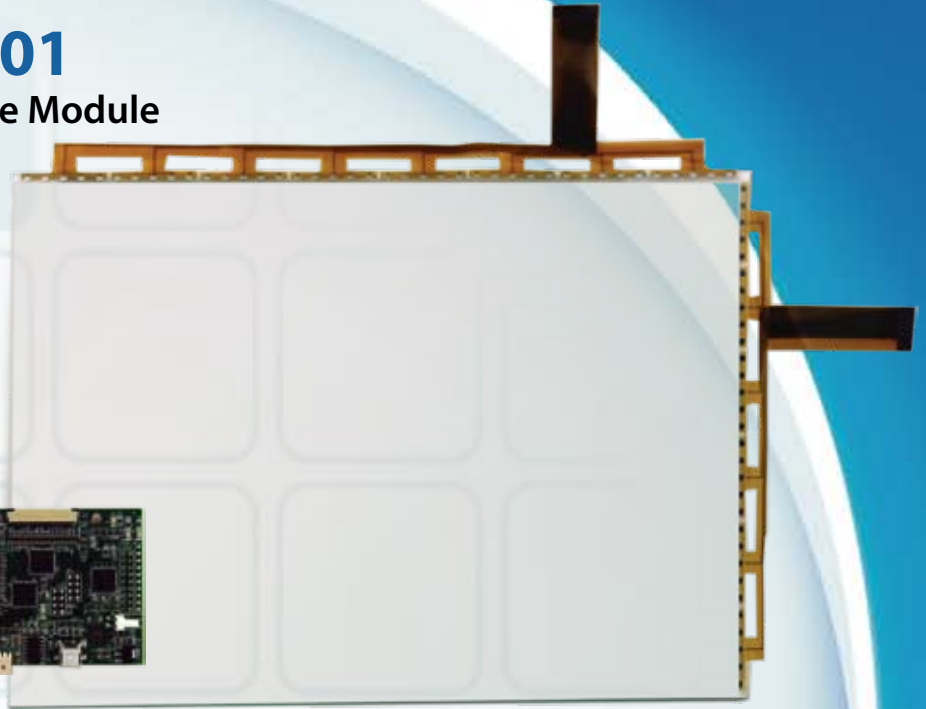

### Applications

- Laptops
- Commercial and Industrial
- Gaming Console

Designed to interface with computer systems through a wide variety of standard interfaces, the 54-B-PMC-11-01 projected capacitive controller is compatible with USB, I2C and Serial communications. Combined with Touch International's proprietary firmware, the controller can easily be tuned to your custom design, as well as a range of different applications. Featuring single touch and gesture (two-finger touch) capabilities, the 54-B-PMC-11-01 controller can help take your application to the next level.

### Features

<b>Motion Detection Method</b>	Capacitive Sensing
<b>X/Y Position Reporting</b>	Absolute Position
<b>Touch Force</b>	No Contact Pressure Required
<b>HID</b>	HID Compliant
<b>Calibration</b>	No Need for Calibration
<b>Chip Set Solution</b>	Available
<b>Touch</b>	Single Touch and Gesture (Two-Finger Touch)
<b>RoHS</b>	Compliant
<b>REACH</b>	Compliant
<b>Warranty</b>	Touch Screen - 10 Yrs.; Controller - 5 Yr.



**88-F-PMC-150-MDL-01**

### Evaluation Kit Includes:

- 15.0" Projected Capacitive Touch Screen (88-F-PMC-150-005)
- 1 PSoC Controller Package (54-B-PMC-150-005)
- LCD (8700174)
- VGA Drive Kit (13B0104)
- OSD Board (1500180)
- Power Adapter (1500179)
- USB Cable (1300264)
- VGA Cable (1300277)

## Touch Screen Specifications

Operating Temperature	-20 to 85°C
Storage Temperature	-40 to 85°C
Relative Humidity	50°C at 90% RH Non-Condensing
Controller Mean Time Between Failures	> 100 Million Touches

## Controller Specifications

Controller Size	2.5" x 2.347" (63.50mm x 59.614mm)
Power Requirements	5 ~ 9V DC Unregulated Power, Typical 60mA
Operating Temperature	-40 to 85°C
Storage Temperature	-40 to 85°C
Relative Humidity	35°C - 95% RH Non-Condensing
Interface	USB: 2.0, 1.1 Compliant (Standard) Optional: USB-UART RS-232 Serial Communication Protocol: No Parity, 8 Data Bits, 1 Stop Bit, 15200 Baud, No Flow Control I2C Communication
Communication Cables	A Plug/5-Pin Mini-B Plug (USB & USB-UART)
Resolution	2048 x 2048
Report Rate	Approx. 20 - 40 Points/Sec.
Mean Time between Failures	> 5.6 Million hrs.
Supported Operating Systems	Windows 2000, XP, Vista and 7; Linux Ubuntu; Mac OSX

## LCD Specifications

LCD Screen Size	15.0" Diagonal
Aspect Ratio	4:3
Brightness	200-260 cd/m2
Contrast Ratio	350:1
Resolution	640 x 480, 800 x 600, 1024 x 768 (Recommended)
Viewing Angle	160° Horizontal / 135° Vertical
Response Time	5ms Rise / 20ms Fall
Pixel Pitch	0.297 (H) mm x 0.297 (V) mm
Outline Dimension	326.0(W) mm x 252.0(H) mm x 11.0(D) mm (Typical)
Backlight	2CCFL
Operating Temperature	0~+50°C
Storage Temperature	-25~+60°C

## LCD Drive Board Specifications

Video Input	VGA Signal Input
Input Voltage	DC 12V, 3.3 A
Operating Temperature	0~+40°C
Storage Temperature	-10~+60°C

For additional information on Touch International products and solutions, contact a sales representative or e-mail [sales@touchintl.com](mailto:sales@touchintl.com).