



REV	DESCRIPTION	ECD #	DFT	CHK	ENG	DATE
-----	-------------	-------	-----	-----	-----	------

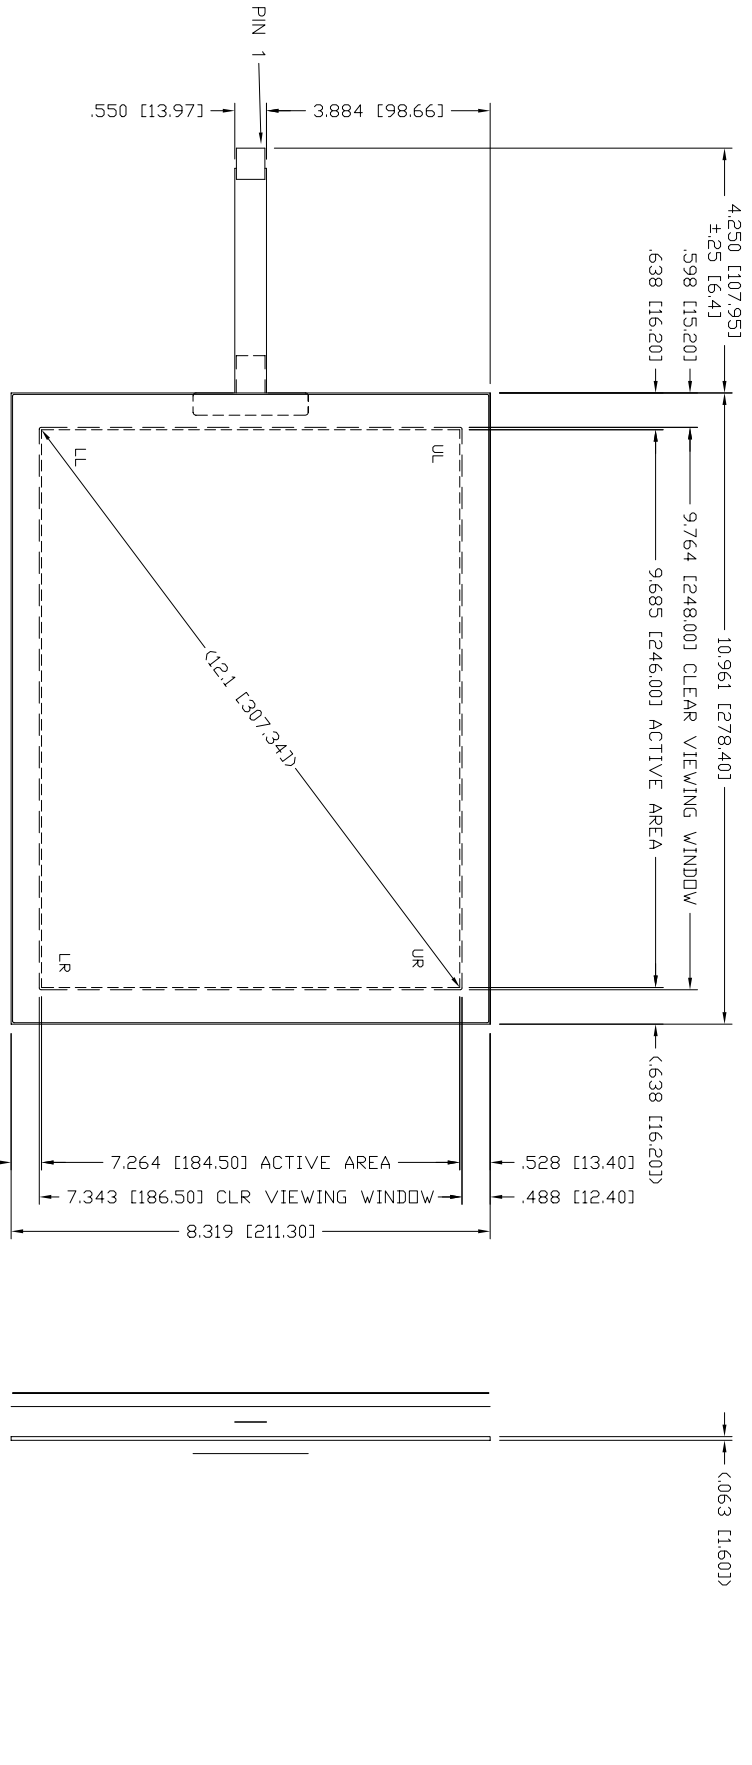

STACK-UP
(CONNECTOR NOT SHOWN)

QTY	ITEM NO	PART NUMBER	DESCRIPTION
1	7	2500127	CONNECTOR
1	6	ASD 7600100	TAIL STRAIN RELIEF
1	5	ASD 6100316	TOPSHEET SUBASSY
A/R	4	4600127	ZA SENSE INTERCONNECT (NOT SHOWN)
1	3	ASD 7900166	TAIL SUBASSY
1	2	ASD 3700444	GASKET SUBASSY
1	1	ASD 5800336	BOTTOM SUBASSY

PINOUT	DESCRIP
1	UL
2	UR
3	SENSE
4	LR
5	LL

FINISHED PART #

DO NOT SCALE DRAWING!
UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES.
REMOVE ALL BURRS AND BREAK SHARP EDGES.
DEC. TOLERANCE:
.XX = ±.060 UNO FRACTIONAL TOL. X/X = ±1/16
.XXX = ±.020 UNO ANGULAR TOL. = ±1°
.XXXX = ±.015 UNO
.XXXXX = ±.008 UNO

NOTICE OF PROPRIETARY RIGHTS
THIS DOCUMENT, AND THE INFORMATION IT CONTAINS, IS PROPRIETARY TO TOUCH INTERNATIONAL. IT MUST NOT BE DUPLICATED, OR ITS CONTENTS USED OR DISCLOSED (IN WHOLE OR IN PART) WITHOUT WRITTEN PERMISSION FROM TOUCH INTERNATIONAL.

DRAWN DATE: R. Johnson 9/06
SCALE: NTS
SHEET 1 OF 1

TITLE: SENSOR RES SW
2222 West Rundberg Ln #100
Austin, Texas 78758
512-832-8292

- NOTES:
1. SPACER DOTS: .008 [1.20] DIA. X .140 [3.56] SPACING (FINGER INPUT) (NOT SHOWN)
 2. TOPSHEET: ANTIQUARE
 3. TOTAL THICKNESS: .074 [1.88] ±10%
 4. FLEXTAIL: DO NOT BEND TO LESS THAN 1/8" RADIUS
 5. LABEL: SERIAL NUMBER & PART NUMBER / REV. (FAR SIDE OF TAIL)
 6. CONNECTOR: 5 POS, .10 PITCH, AMP 487378-4