REV	DESCRIPTION	ECO #	DFT	CHK	ENG	DATE
2.1	CHANGED SPACER DOT DIAMETER: WAS .004 X .140	0506057			JH	06/02/05

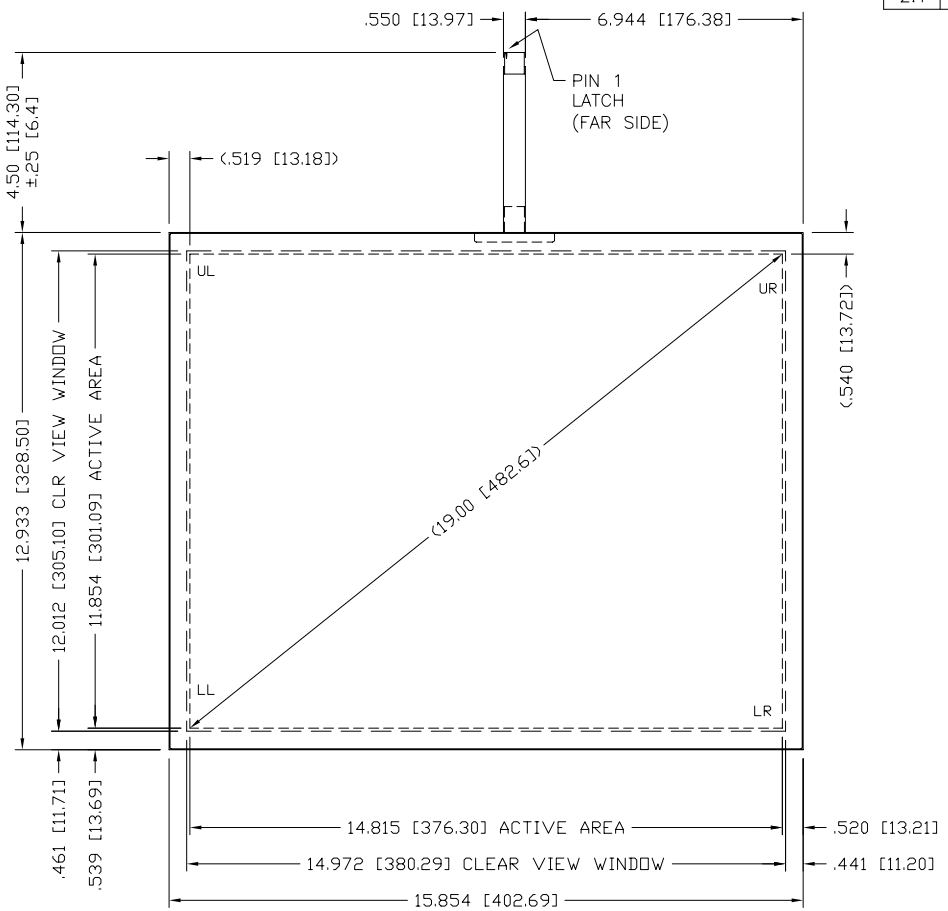



STACK-UP

PINOUT	
PIN	DESCRIP
1	LR
2	LL
3	SENSE
4	UR
5	UL

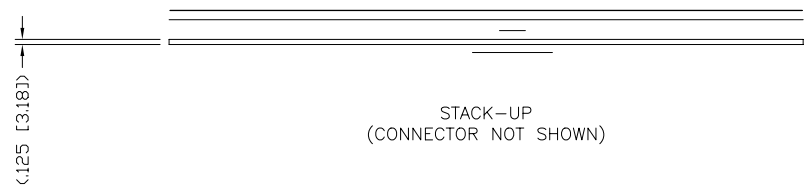

STACK-UP
(CONNECTOR NOT SHOWN)

NOTES:

1. SPACER DOTS: .006 [.15] X .140 [3.56] (FINGER INPUT) (NOT SHOWN)
2. TOPSHEET: ANTIGLARE
3. TOTAL THICKNESS: .136 [3.45] ±10%
4. FLEXTAIL: DO NOT BEND TO LESS THAN 1/8" RADIUS
5. LABEL: SERIAL NUMBER & PART NUMBER / REV. (FAR SIDE OF TAIL)
6. CONNECTOR: 5 POS, .10 PITCH, LATCH, AMP 487526-4

QTY	ITEM NO	PART NUMBER	DESCRIPTION
1	7	2500108	CONNECTOR
1	6	ASD 7600102	TAIL STRAIN RELIEF
1	5	ASD 6100202	TOPSHEET SUBASSY .007 THK
A/R	4	4600127	ZA SENSE INTERCONNECT (NOT SHOWN)
1	3	ASD 7900201	TAIL SUBASSY .003 THK
1	2	ASD 3700239	GASKET SUBASSY .004 THK
1	1	ASD 5800218	BOTTOM SUBASSY .125 THK

FINISHED PART #

NEXT ASSY #

DO NOT SCALE DRAWING !

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES. REMOVE ALL BURRS AND BREAK SHARP EDGES.

DEC. TOLERANCE:
.XX = ±.060 UNO
.XXX = ± .020 UNO
.XXXX = ± .015 UNO
.XXXXX = ±.008 UNO

FRAC. TOL. X/X = ±1/16
ANGULAR TOL. = ±1°

NOTICE OF PROPRIETARY RIGHTS

THIS DOCUMENT, AND THE INFORMATION IT CONTAINS, IS PROPRIETARY TO TOUCH INTERNATIONAL. IT MUST NOT BE DUPLICATED, OR ITS CONTENTS USED OR DISCLOSED (IN WHOLE OR IN PART) WITHOUT WRITTEN PERMISSION FROM TOUCH INTERNATIONAL.

DRAWN DATE
R. Johnson 10/04

SCALE: NTS

SHEET 1 OF 1

TOUCH INTERNATIONAL
2222 West Rundberg Ln #100
Austin, Texas 78758
512-832-8292

TITLE:
SENSOR RES 5W
19.0 DIAG

SIZE A | DWG. NO. 48-F-5-190-004 | REV. 2.1

ACAD