
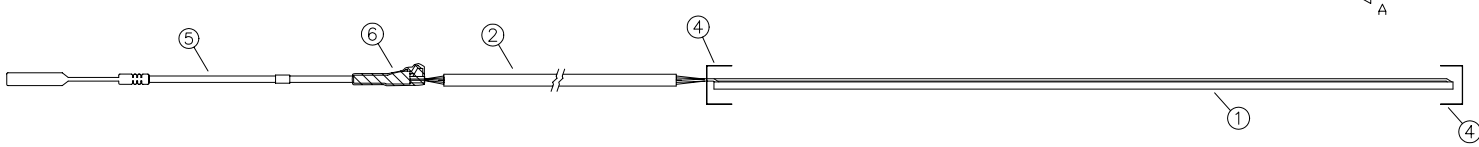


REV	DESCRIPTION	ECD #	DFT	CHK	ENG	DATE
-----	-------------	-------	-----	-----	-----	------

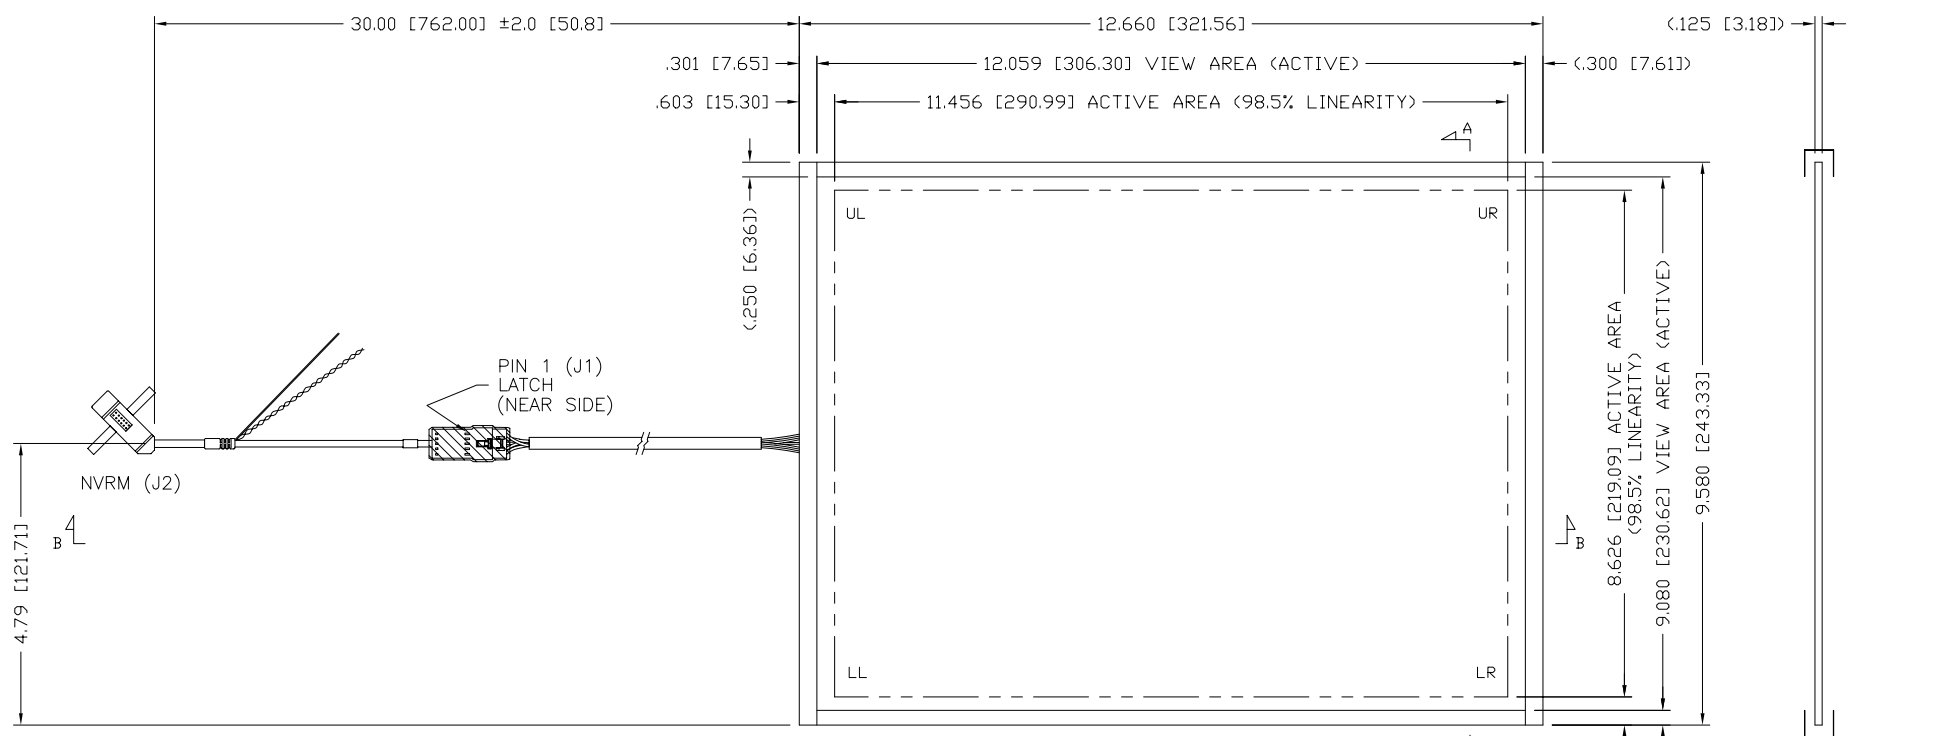

SECTION B-B
STACK-UP

SECTION A-A
STACK-UP
(CABLE & CONNECTORS
NOT SHOWN)

J1 PINOUT	
PIN	DESCRIP
1	LR
2	LL
3	SENSE/NC
4	UL
5	UR

J2 PINOUT	
PIN	DESCRIP
8	DRIVE 1
8	SHIELD
9	UR
10	LR
11	UL
12	LL

1.4	6	1600138	HEATSHRINK, .75
1	5	7900101	NOVRAM, 7"
89.0	4	8200100	TAPE, KAPTON, .50
A/R	3	7300100	SOLDER (NOT SHOWN)
1	2	7900102	TAIL SUBASSY
1	1	4000113	BOTTOM SUBASSY .125 THK
QTY	ITEM NO	PART NUMBER	DESCRIPTION

FINISHED PART #	NEXT ASSY #
-----------------	-------------

DO NOT SCALE DRAWING !
 UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES.
 REMOVE ALL BURRS AND BREAK SHARP EDGES.
 DEC. TOLERANCE:
 .XX = ±.060 UNO FRAC. TOL. x/x = ±1/16
 .XXX = ±.030 UNO ANGULAR TOL. = ±1°
 .XXXX = ±.015 UNO
 .XXXXX = ±.008 UNO

TOUCH INTERNATIONAL
 2222 West Rundberg Ln #100
 Austin, Texas 78758
 512-832-8292

SENSOR CAP 5W
 15.0 DIAG W/ NVRM

NOTICE OF PROPRIETARY RIGHTS
 THIS DOCUMENT, AND THE INFORMATION IT CONTAINS, IS PROPRIETARY TO TOUCH INTERNATIONAL. IT MUST NOT BE DUPLICATED, OR ITS CONTENTS USED OR DISCLOSED (IN WHOLE OR IN PART) WITHOUT WRITTEN PERMISSION FROM TOUCH INTERNATIONAL.

DRAWN DATE R Johnson 4/06	SCALE: NTS	SIZE A	DWG. NO. 57-150FA-101-1	REV. 2.0
------------------------------	------------	-----------	----------------------------	-------------

- NOTES:
- TOTAL THICKNESS: .180 [4.6] ±10%
 - LABEL: SERIAL NUMBER & PART NUMBER / REV
 - CONNECTOR(J1): 5 POS, .10 PITCH, LATCH, AMP 104257-4
 - VLT @83% OR GREATER
 - OPERATING TEMP: -20°C TO +70°C, 5% TO 90% RH
 - STORAGE TEMP: -50°C TO +85°C, <35% RH
 - ETCH FINISH: AGO