
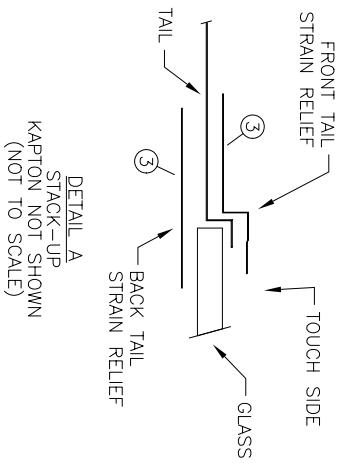


REV	DESCRIPTION	ECD #	DFT	CHK	ENG	DATE
2.1	CHANGED TAIL. WAS: 7900103	0506058			JH	6/6/05
2.2	CHG'D TAIL EXIT CONFIG. WAS: FROM FRONT SURFACE	0703173				S.S.R.4/17/07

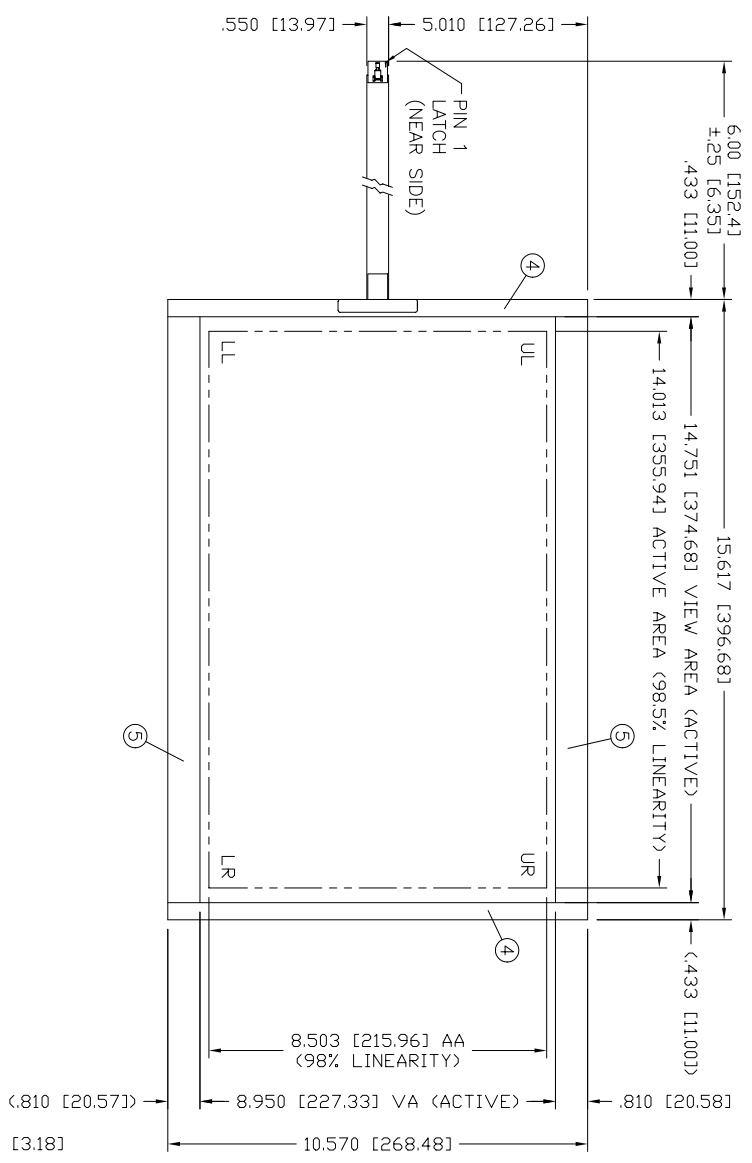

PINOUT	
PIN	DESCRIP
1 (RED)	UL
2 (GREEN)	UR
3 (ORANGE)	SENSE/INC
4 (BLACK)	LR
5 (WHITE)	LL

- NOTES:
- TOTAL THICKNESS: .128 [3.25] ±10%
  - FLEXTAIL: DO NOT BEND TO LESS THAN 1/8" RADIUS
  - LABEL: SERIAL NUMBER & PART NUMBER / REV. (FAR SIDE OF TAIL)
  - CONNECTOR: 5 POS., .10 PITCH, LATCH, AMP 487526-4
  - VLT @83% OR GREATER
  - OPERATING TEMP: -20°C TO +70°C, 5% TO 90% RH
  - STORAGE TEMP: -50°C TO +85°C, <35% RH
  - KAPTON TAPE: EDGE ISOLATION & VIEW AREA DEFINITION

QTY	ITEM NO	PART NUMBER	DESCRIPTION	FINISHED PART #	DO NOT SCALE DRAWING. UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES. REMOVE ALL BURRS AND BREAK SHARP EDGES. DEC. TOLERANCE:
1	6	2500108	CONNECTOR		.xxx = ±.060 UNO FRACTIONAL X/X = ±1/16
32.0	5	8200111	TAPE, KAPTON, 1.5		.xxxx = ±.030 UNO
22.0	4	8200104	TAPE, KAPTON, 1.0		.xxxxx = ±.015 UNO ANGULAR TOL. = ±1°
2	3	7600116	STRAIN RELIEF SW T-WRAP		
1	2	7900223	TAIL SUBASSY		
1	1	4000157	BOTTOM SUBASSY		
NEXT ASSY #					TOUCH INTERNATIONAL
DESCRIPTION					2222 West Rundberg Ln #100
					Austin, Texas 78758
					512-832-8292
TITLE					SENSOR CAP SW
					17.0 DIAG
DRAWN DATE					R. Johnson 05/04
SCALE: NTS					
SHEET 1 OF 1					
SIZE					DWG. NO.
A					57-170FA-012
REV.					2.2