


REV	DESCRIPTION	ECD #	DFT	CHK	ENG	DATE
2.3	CHANGED TAIL. WAS: 7900103	0506058			JH	6/6/05

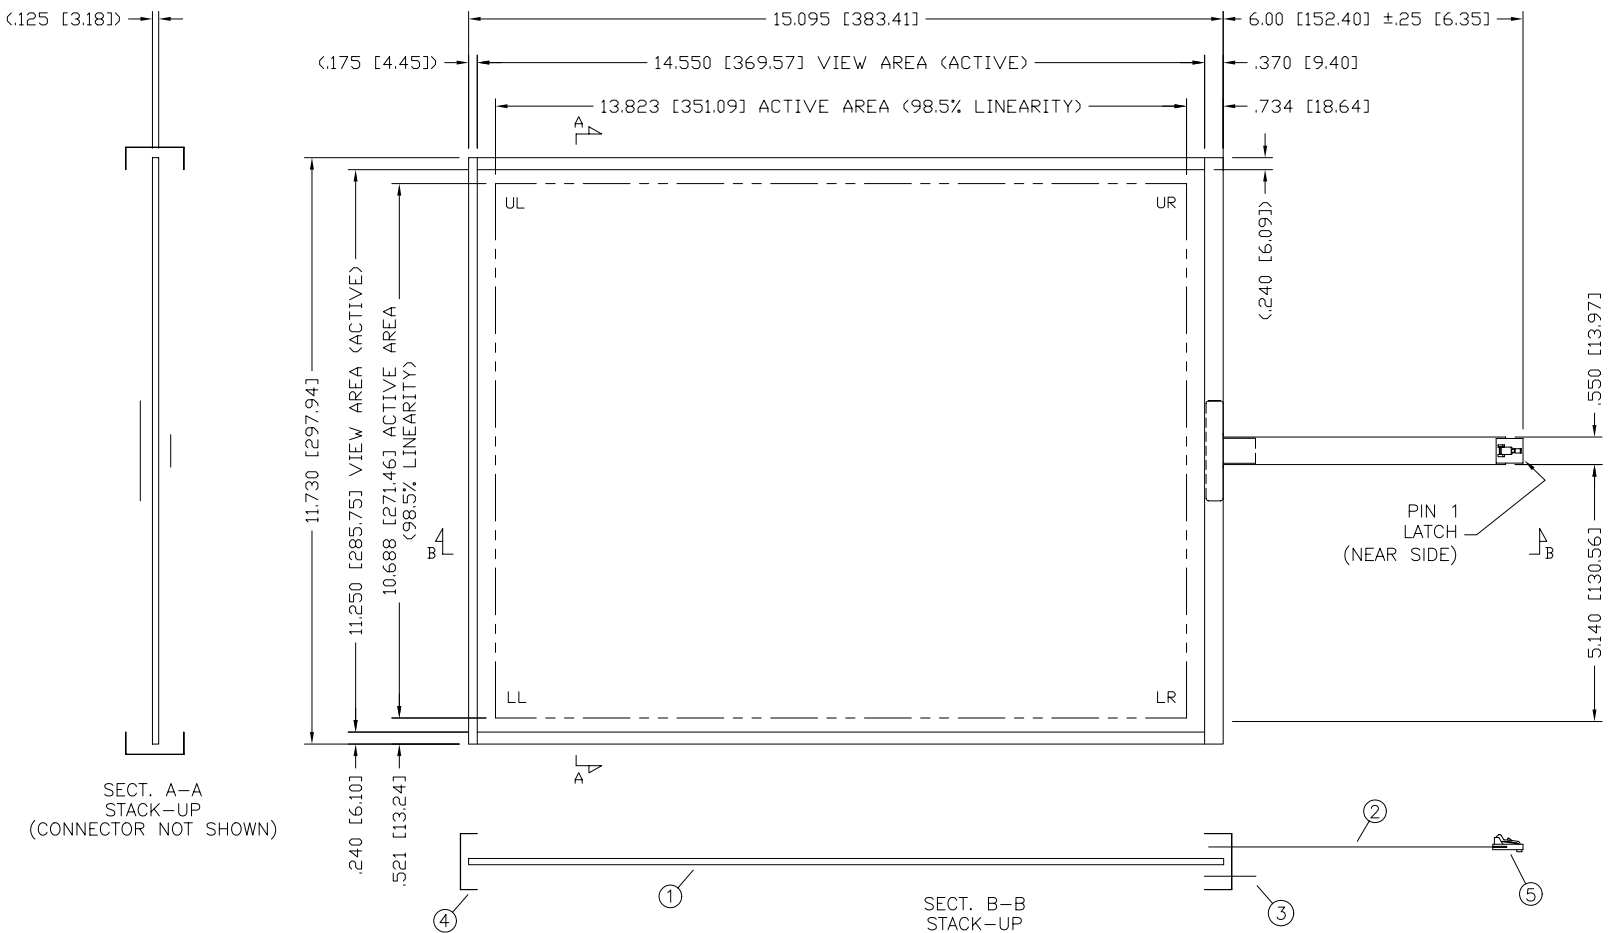


SECT. A-A  
STACK-UP  
(CONNECTOR NOT SHOWN)

SECT. B-B  
STACK-UP

PINOUT	
PIN	DESCRIP
5	UR
4	UL
3	SENSE/NC
2	LL
1	LR

1	5	2500108	CONNECTOR
55.0	4	8200100	TAPE, KAPTON
1	3	7600102	TAIL STRAIN RELIEF
1	2	7900223	TAIL SUBASSY
1	1	4000120	BOTTOM SUBASSY .125 THK
QTY	ITEM NO	PART NUMBER	DESCRIPTION

FINISHED PART #		NEXT ASSY #	
<p><b>DO NOT SCALE DRAWING !</b>          UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES. REMOVE ALL BURRS AND BREAK SHARP EDGES.          DEC. TOLERANCE:          .XX = ±.060 UNO    FRAC. TOL. X/X = ±1/16          .XXX = ± .030 UNO          .XXXX = ± .015 UNO    ANGULAR TOL. = ±1°          .XXXXX = ±.008 UNO</p>			
NOTICE OF PROPRIETARY RIGHTS			
THIS DOCUMENT, AND THE INFORMATION IT CONTAINS, IS PROPRIETARY TO TOUCH INTERNATIONAL. IT MUST NOT BE DUPLICATED, OR ITS CONTENTS USED OR DISCLOSED (IN WHOLE OR IN PART) WITHOUT WRITTEN PERMISSION FROM TOUCH INTERNATIONAL.		TOUCH INTERNATIONAL 2222 West Rundberg Ln #100 Austin, Texas 78758 512-832-8292	
DRAWN DATE R. Johnson 5/04		TITLE: SENSOR CAP 5W 18.1 DIAG	
SCALE: NTS	SIZE	DWG. NO.	REV.
SHEET 1 OF 1	A	57-181FA-002	2.3

- NOTES:
- TOTAL THICKNESS: .128 [3.25] ±10%
  - FLEXTAIL: DO NOT BEND TO LESS THAN 1/8" RADIUS
  - LABEL: SERIAL NUMBER & PART NUMBER / REV. (FAR SIDE OF TAIL)
  - CONNECTOR: 5 POS, .10 PITCH, LATCH, AMP 487526-4
  - VLT @83% OR GREATER
  - OPERATING TEMP: -20°C TO +70°C, 5% TO 90% RH
  - STORAGE TEMP: -50°C TO +85°C, <35% RH